




与您共同创建世界一流的实验室
BUILDING WORLD-CLASS LABORATORIES WITH YOU

石化 / 科研 / 教学 / 医疗 / 实验室家具及周边设备

PETROCHEMICAL/RESEARCH/EDUCATION/MEDICINE/
LABORATORY FURNITURE AND ACCESSORIES

第 40 期 NO.40

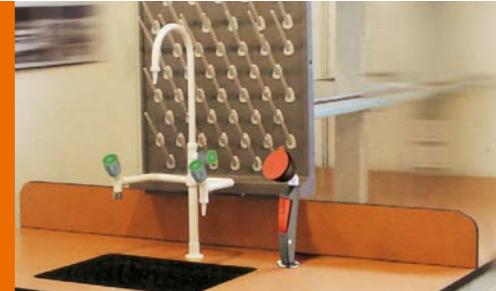

河北润旺达洁具制造有限公司

地址：河北省武强县工业区

电话：0318-3825888 3822363

传真：0318-3821299

邮政编码：053300

网址：<http://www.chinarwd.com> <http://www.labfaucet.cn>

邮箱：postmaster@chinawujie.com

HEBEI RUNWANGDA MAKING CLEAN MATERIALS CO.,LTD

ADD:Industrial District,Wuqiang county ,Hebei province,China

TEL:+86-318-3832252 3832163


FAX:+86-318-3821299

POSTCODE: 053300

[HTTP://www.runwangda.net](http://www.runwangda.net)

E-MAIL:postmaster@chinawujie.com

因产品改进和更新，产品介绍与实物不符时，以实物为准
All changes specification in catalog are subject to actual products.

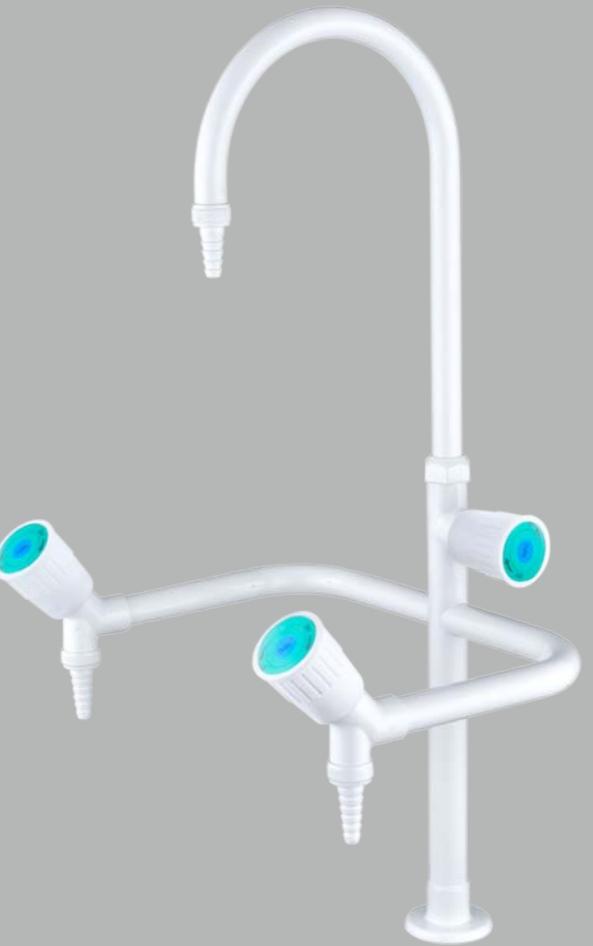

HEBEI RUNWANGDA MAKING CLEAN MATERIALS CO.,LTD

— SINCE 1982 —





与您共同创建世界一流的实验室
Building world-class laboratories with you

- 通过 ISO9001 国际质量管理体系认证
- 中国节水认证
- CSA 认证
- CE 认证
- SGS 认证
- 中国人民财产保险公司承保



润旺达拥有多项产品专利，所有化验水龙头、气体考克、紧急冲淋洗眼装置可接受来样定做。

Runwangda possesses many product patents.all of faucets,gas fittings and emergency shower & eye wash can be customized,please supply design and sample.

CERTIFICATE OF HONOR

荣誉证书



公司简介

河北润旺达洁具制造有限公司创建于 1982 年，总部占地 40 余亩，拥有职工 200 余人，是国内历史悠久、规模较大的实验室和安全设备领域制造商。专注于实验室水龙头、气体考克、万向抽气罩、滴水架、PP 水槽、紧急冲淋洗眼器等产品的研发和生产，涉及领域包括教育、科研、制药、医疗、化工、石化、电子、冶金、机械等。

润旺达公司拥有重力铸造、冲压、数控精加工、抛光、电镀、喷塑、注塑、塑胶、激光打标、组装一条龙生产线，生产设备精良，生产力量雄厚，拥有 2000m² 成品仓库。严格依照国家及国际标准生产，如美国 ANSI Z358.1-2014 标准、GB18145 标准，严格按照 ISO9000 国际质量体系管理，运用 ERP 系统优化业务管理流程，为顾客提供优质便捷的服务。润旺达在国内外享有盛誉，产品出口到国外三十多个国家，为多家国际知名厂家提供 OEM 贴牌加工，与国际先进标准并轨。

经过多年的发展，润旺达斥资建立了同行业厂家中近乎少有的大型模具开发中心和产品检测中心，模具开发中心拥有多台美国 HAAS 数控模具加工中心、车削中心、镗铣中心、线切割中心、电火花等国内外知名数控设备；产品检测中心拥有光谱仪、盐雾试验机、寿命测试机、水压密封测试机、气密性测试机、强度测试机、流量测试机、等多台先进检测设备，构建了高效的企业研发和产品检测体系，参与了国家标准《应急喷淋和洗眼设备》项目的申报立项工作，不断提升生产工艺和效率，获得多项洗眼器专利证书，满足并超越行业需求。

润旺达公司为中国教育装备协会会员、中国安全生产协会会员、中国纺织品商业协会安全健康防护用品委员会理事单位，拥有“武洁”“润旺达”两大知名商标，均为河北省著名商标，产品被评为河北省名牌产品。实验室水龙头系列和气体考克系列通过 CE、CSA 和 SGS 认证，通过中国节水认证。万向抽气罩系列通过 CE 和 SGS 认证。紧急冲淋洗眼器系列通过 CE 认证，通过美国 ANSI Z358.1-2014 标准检测，被评选为全国劳保行业推荐品牌。

全系列产品由中国人民财产保险股份有限公司承保。

润旺达公司努力做好每个细节，为您提供优质的产品和服务。

COMPANY INTRODUCTION

Hebei Runwangda Making Clean Materials Co., Ltd. was founded in 1982. It covers an area of over 26,000 square meters and has more than 200 employees. It is one of the largest domestic laboratory and safety equipment manufacturers with a long history. We focus on the laboratory faucets, gas valve, fume extractor, pegboard, PP sink, Emergency shower and eye wash series products research & development and production, involving areas such as education, scientific research, pharmaceutical, medical, chemical, petrochemical, electronics, metallurgy, machinery, etc.

Runwangda company has gravity casting, stamping, CNC machining, polishing, electroplating, plastic spraying, laser marking, assembling one-stop production lines, excellent production equipment, strong production strength and the warehouse covers over 2000m² for finished goods. Production strictly in accordance with national and international standard, such as the United States ANSI Z358.1-2014 standard, GB18145 standard, management accordance with the international ISO 9000 Quality system, using the ERP system to optimize business process, to provide customers with high quality and convenient service. Runwangda enjoys a good reputation in the domestic and overseas, products are exported to more than 30 countries, provides OEM processing for many international well-known company, synchronizes the advanced international standards.

After many years development, Runwangda established large mold development center and product testing center, that is rare in the same industry manufacturers, mold development plant has several American HAAS CNC mold machining center, turning center, boring and milling center, line cutting, EDM and other domestic and foreign well-known numerical control equipment; Product testing center has spectrometer, salt spray testing machine, lifetime testing machine, hydraulic pressure testing machine, air tightness testing machine, strength testing machine, flow testing machine etc., many sets of advanced testing equipment, built the efficient enterprise research & development and product testing system, participated in the national standard project "emergency shower and eye wash equipment" declare and project work, improving production technology and efficiency, winning many eye wash products patent certificates, meet and exceed industry requirement.

Runwangda company is a membership of China Education Equipment Association, China safety Production Association, Protective equipment safety and Health Committee China textile Commercial Association director unit, have "WUJIE" "RUNWANGDA" two well-known trademark, both of them are famous brand in Hebei province, products have been rated as brand-name products in Hebei province. Emergency eye wash series products passed the CE Certification, passed the United States ANSI Z358.1-2014 standard testing, named the recommended brand by the national labor insurance industry. The whole range of products is insured by Peoples Insurance Company of China.

Runwangda company makes effort to do every detail to provide you high quality products and services.



CONTENT 目录

化验水咀

LAB FAUCET

01

水阀 / 气阀

WATER/GAS VALVE

20

紧急冲淋洗眼装置

EMERGENCY SHOWER & EYE WASH

24

滴水架

PEGBOARD

31

水槽 / 杯槽

SINK/CUP SINK

34

万向抽气罩

FUME EXTRACTOR

40

旋钮配色表

COLOR CODING OF OPERATING HANDLES

51

触控智能水嘴

DIGITAL THERMOSTATIC FAUCET

1. 智能恒温水，360° 旋转龙头，实时温度显示
2. 精工品质，科技感十足
3. TFT 高清显示，触屏控制水温和流量
4. 自动计时，节水节能
5. 全封闭设计，防止串水，适应性强
6. 双电源系统，停电无忧，同时配置电池和交流两种供电方式，包装盒内已附送电池（空运因禁止含电池，故不包含电池）
7. 冷热水同时供水，水龙头才能正常出水，否则出水几秒后自动关闭
8. 此类为弱电产品，功率约 3.3W。电压为 100~240V
9. 本产品触摸屏幕控制，无自动感应功能。


1. Intelligent constant temperature water, 360 rotating faucet, real-time temperature display
2. Seiko quality, full sense of science and technology
3. TFT High Definition Display, Touch Screen Control Water Temperature and Flow
4. Automatic timing, water saving and energy saving
5. Fully enclosed design to prevent water crossing and strong adaptability
6. Dual power supply system, no worries about blackouts, while equipped with battery and AC power supply mode, the packaging box has already been installed.
- Supplementary Batteries (Batteries are not included in air transportation due to the prohibition of containing batteries)
7. Cold and hot water supply at the same time, the tap can normal water, otherwise the water will automatically close after a few seconds.
8. This kind of product is a weak current product with a power of about 3.3W. Voltage 100~240V
9. This product touch screen control, no automatic induction function.



显示区域 display area
开关机键 power on/off

水温调节 - water TEMP adjust -
水温调节 + water TEMP adjust +
流量调节 - water flow adjust -
流量调节 + water flow adjust +

实时时钟 Clock
流量级数指示 Water flow
00:09
38°C
2014/01/13
电池电量提示 Battery bar
出水温度和设置温度 Water TEMP
温度设置标识 TEMP setting icon
日历显示 Calendar



LOGO 界面
Logo interface



开机工作界面
Working interface



过热提示
Overheat tips



电量不足提示
Battery is low




系统设置界面
Setting interface




F2301
二联化验水咀
Tow Way Assay Faucet

产品特点：
双进水管路，可分别连接冷水和热水；可单独出冷水，单独出热水，亦可冷热混合出水，水温可调。

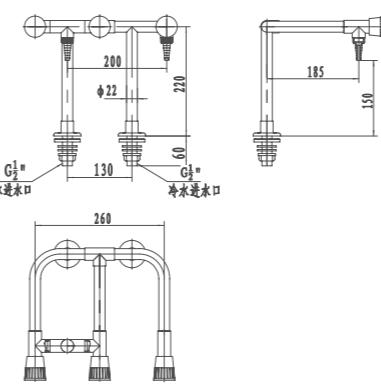



F3304
三联化验水咀
Three Way Assay Faucet

产品特点：
专利新品，台上拆装，操作灵活，顶丝+锁母双重固定，连接牢固，稳定可靠。简状过滤网，加大过水面积，不易堵塞，清洗更方便。

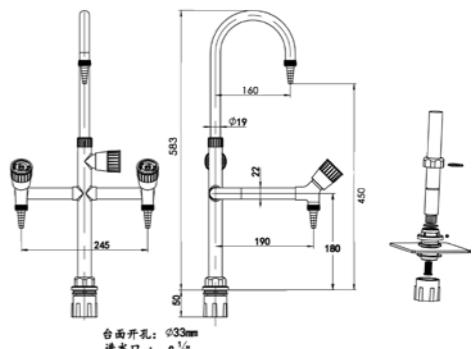


F3303
三联化验水咀
Three Way Assay Faucet

产品特点：
独立进水，独立排水，适用于没有地下排水系统的实验室使用

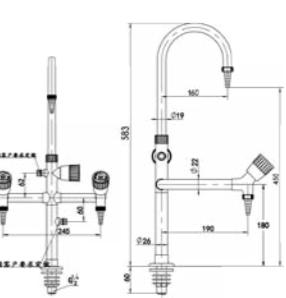
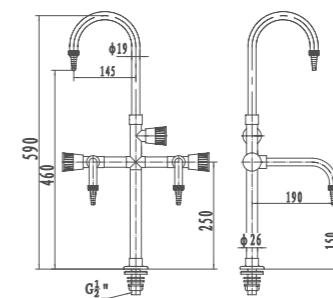


F3305
三联化验水咀
Three Way Assay Faucet

产品特点：
分体包装，运输安装方便、快捷；出水管均可 360 度旋转，使用灵活方便；水平两弯管除可接常规出水嘴外，还可接起泡器和洗眼喷头等，且喷头角度可任意调节。

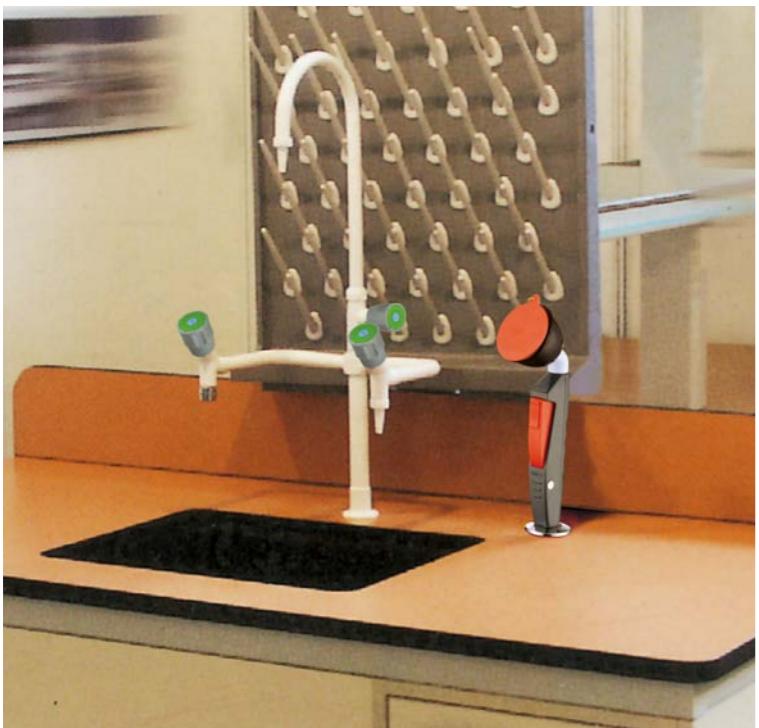


F3302
三联化验水咀
Three Way Assay Faucet

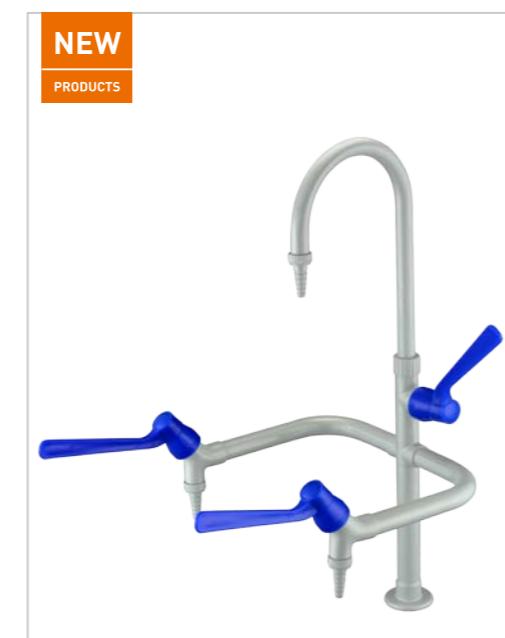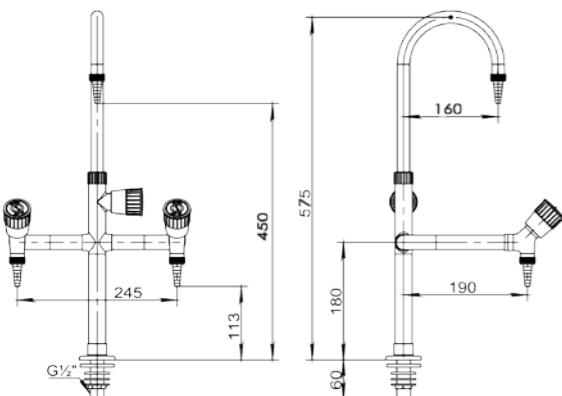


F3302A
三联化验水咀(肘动)
Three Way Assay Faucet(Swing)




F2203
双联化验水咀
Two way Assay Faucet

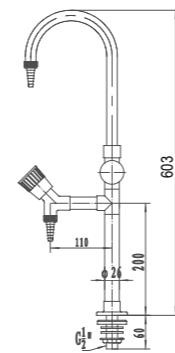


F2201
双联化验水咀
Two way Assay Faucet

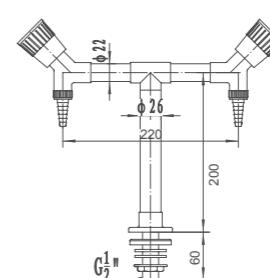


F2202
双联化验水咀
Two way Assay Faucet

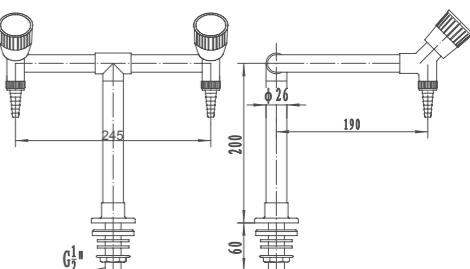


F2203-1
双联化验水咀
Two way Assay Faucet

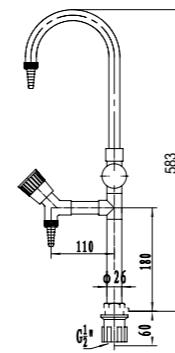

F2201-1
双联化验水咀
Two way Assay Faucet



F2202-1
双联化验水咀
Two way Assay Faucet

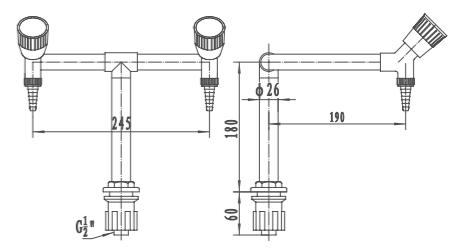

台式多功能水咀

- 金属材质: 加厚铜质
- 涂层: 高亮度环氧树脂涂层, 耐腐蚀、耐热, 防紫外线辐射
- 陶瓷阀芯: 使用寿命开关 50 万次, 静态最大耐压 35 巴
- 可拆卸水嘴, 可加接防溅起泡器
- 开关旋钮: 高密度 PP, 符合人体工学设计, 轻便快捷
- 万向花洒: 可用于冲洗器皿, 洗眼, 可调节出水方向、水花泡沫丰富, 防溅

Multi-function faucet

- Metal: solid brass
- Coating: Gloss epoxy powder, resistant to most chemicals, UV fading and heat
- Ceramic headwork: 500,000 life cycles, water static pressure Max, 35 bar
- Detachable serrated nozzle, splash bubbler is optional
- Knob switch: high grade poly-propylene, the ergonomic design, convenient and fast
- The spray head: used to wash eyes or flush vesseled, adjustable direction and water spray, rich foam to prevent splashing.




台式三联水咀

- 金属材质: 加厚铜质
- 涂层: 高亮度环氧树脂涂层, 耐腐蚀、耐热, 防紫外线辐射
- 陶瓷阀芯: 使用寿命开关 50 万次, 静态最大耐压 35 巴
- 可拆卸水嘴, 可加接防溅起泡器
- 开关旋钮: 高密度 PP, 符合人体工学设计, 轻便快捷

THREE WAY BENCH FAUCET

- Metal: solid brass
- Coating: Gloss epoxy powder, resistant to most chemicals, UV fading and heat
- Ceramic headwork: 500,000 life cycles, water static pressure Max, 35 bar
- Detachable serrated nozzle, splash bubbler is optional
- Knob switch: high grade poly-propylene, the ergonomic design, convenient and fast

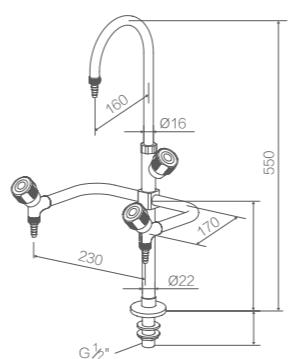



WJH0211DA

单联化验水咀 (肘动)
Single Assay Faucet (Swing)

WJH0211D

单联化验水咀
Single Assay Faucet

WJH0211DB

单联化验水咀
Single Assay Faucet



WJH1316

单联冷热化验水咀
Single Cold-hot Assay Faucet



WJH1316B

单联冷热化验水咀
Single Cold-hot Assay Faucet



F0733

冷热三联化验水咀
Three Way Cold-hot Assay Faucet



WJH1312A

单联化验水咀 (肘动)
Single Assay Faucet (Swing)

WJH1312

单联化验水咀
Single Assay Faucet

WJH1312B

单联化验水咀
Single Assay Faucet



WJH0716

单联冷热化验水咀
Single Cold-hot Assay Faucet




WJH0609B (灰色)

单联冷热化验水咀
Single Cold-hot Assay Faucet



WJH0609A (灰色)

单联冷热化验水咀
Single Cold-hot Assay Faucet

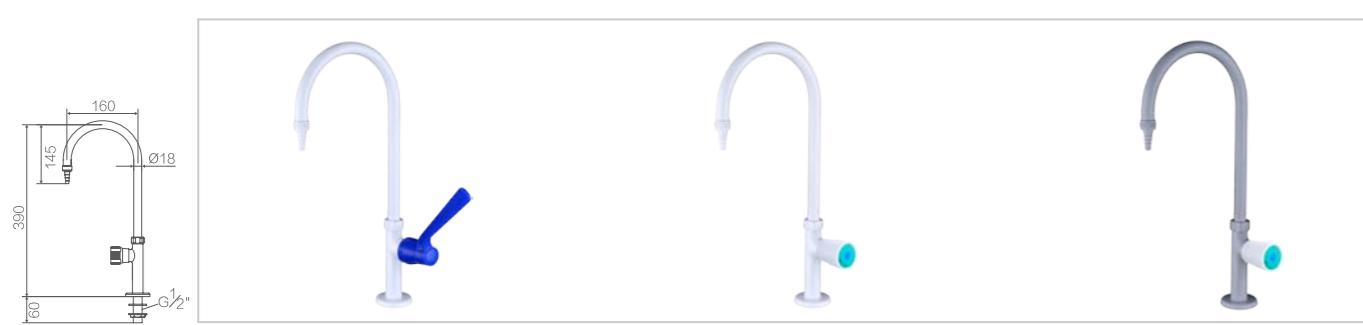

WJH1314A


单联化验水咀 (肘动)
Single Assay Faucet (Swing)

WJH1314

单联化验水咀
Single Assay Faucet


WJH1314B

单联化验水咀
Single Assay Faucet

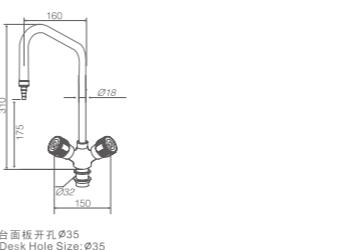


WJH0716

单联冷热化验水咀
Single Cold-hot Assay Faucet

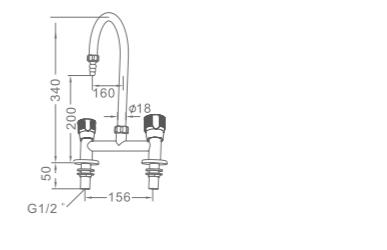

WJH0609B (灰色)

单联冷热化验水咀
Single Cold-hot Assay Faucet

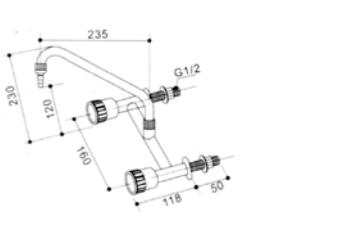


WJH0609A (灰色)


单联冷热化验水咀
Single Cold-hot Assay Faucet




WJH0833
三联化验水咀
Three Way Assay Faucet

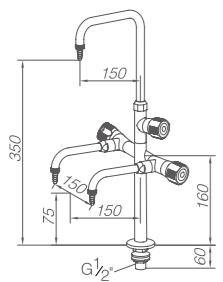


WJH0811
单联化验水咀
Single Assay Faucet

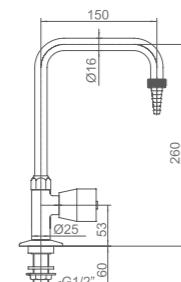


WJH0822
双联化验水咀
Two Way Assay Faucet

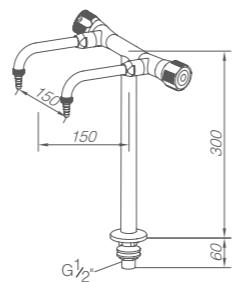


WJH0922
双联化验水咀
Two Way Assay Faucet

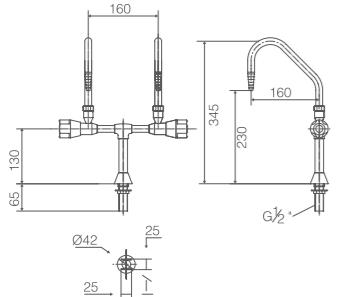

WJH0911
单联化验水咀
Single Assay Faucet

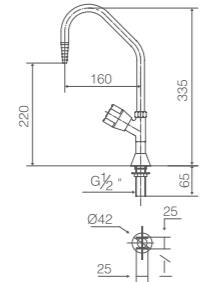

WJH0914
单联化验水咀
Single Assay Faucet



超纯水龙头

- 100%无污染、原质PVDF耐腐蚀，特别适用于配制精密试剂的超纯净水实验室。
- 超精密针阀(特氟纶密封)，可精确调节水流。



WJH0608A
单联超纯水咀
Ultra-Pure Faucet



WJH0608B
PP 单联化验水咀
PP Single Assay Faucet



WJH0608C
PP 单联化验水咀
PP Single Assay Faucet



WJH0608A-1
单联超纯水咀
Ultra-Pure Faucet



WJH0719
单联供水考克
Single Water Cock



WJH0719A
脚踏式水龙头
Treadle-operation type faucet

水咀专用脚踏开关

- 金属材质：锌合金
- 功能：通过脚踏开关来控制水咀出水；避免在实验过程中手与水咀直接接触，防止二次污染。

Foot Treadle Specialized for Faucets

- Metal: solid brass
- Function/Description: To control the outflow of faucets without necessity to operate the handles



膝控水咀

- 膝控全方位水咀以节能、卫生、耐用、方便、美观等优点，取代了感应水咀；获得使用者的青睐
- 阀杆水平距地面 15CM 以上高度均可
- 阀杆露出台面 12CM 为准，也可由使用习惯而定
- 阀杆的活动半径 15CM 内不能有阻碍物
- 冷、热水进水连接方法如图所示，请勿接反温水直接连接至台面出水弯管即可
- 将恒温棒调节到 38℃ 刻度线，需与白点标示处对齐

KNEE-CONTROLLED WATER TAP

- Knee-controlled water tap can replace of sensor taps because of its merits,such as saving - energy,h
ealth,durable,convenience,aesthetics, etc.,Which access to the user's favor.
- Valve rod should be high from the ground level more than 15cm
- Valve rod should be high from the worktop 12cm,or it can be determined base on the users habit.
- Operating radius of 15cm should not be causing obstruction.
- Cold or hot water inlet connection method is shown as sketch map,do not make anti—connection.If
warm water,pls directly connected the water pipe to the outlet siphon on the table.
- Take the rod thermostat to 38° scale,to be aligned with the white logo.



中国第一款全方位控制医用龙头
China's first all-round control of the leading medical faucet
手术室无二次感染专用龙头
A dedicated operating room without secondary infection faucet



WJH0916

膝控医用水咀
Knee-controlled water tap





WJH0915

恒温膝控阀
Knee temperature control valve




WJH0915A

单冷膝控阀
Single cold knee control valve

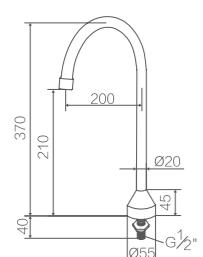

阀杆以本身为中心 360° 方向随意拨动均可出水。
valve rod can be slewed around in a complete circle,that is to say 360° direction can be activated.

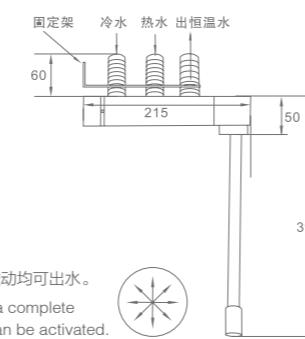


WJH0453H

感应实验室水咀
Sensor Laboratory Faucet



WJH0812

感应实验室水咀
Sensor Laboratory Faucet

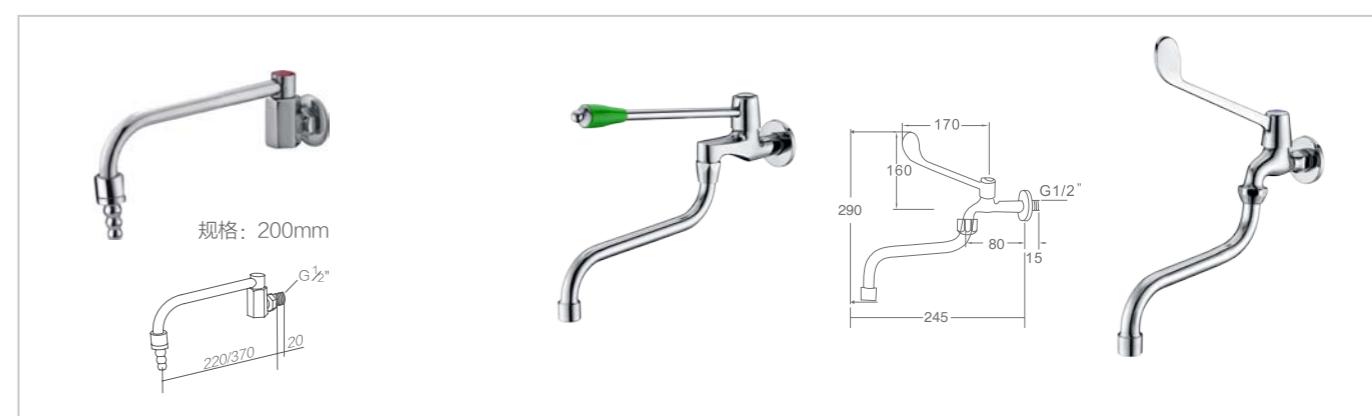

WJH0610A

单联肘动医用水咀
Single Swing Assay Faucet

WJH0610B

单联肘动医用水咀
Single Swing Assay Faucet

WJH0610C

单联肘动医用水咀
Single Swing Assay Faucet



WJH0610D

单联肘动医用水咀
Single Swing Assay Faucet

WJH0610E

单联肘动医用水咀
Single Swing Assay Faucet

WJH0610F

单联肘动医用水咀
Single Swing Assay Faucet

不锈钢龙头壳体在非人为损坏下 30 年不变


不锈钢龙头倍受广大消费者青睐的原因，主要是：

- 1. 用水标准：不含铅，达到绝对纯净，不会对水资源产生二次污染；
- 2. 绿色环保：物理表面处理，无需电镀，不会对环境产生污染；
- 3. 洁净耐用：无腐蚀，使用寿命长。清洁方便，只需轻轻擦拭，即可亮丽如新。

STAINLESS STEEL FAUCET BODY UNDER THE NON-ARTIFICIAL DAMAGE,30 YEARS UNCHANGED


Masses of consumers favor the stainless steel faucet, the mainly causes as follows:

- 1.Drinking healthy: contains no lead, reach to absolute purity, won't produce secondary pollution to water.
- 2.Green environmental protection:physical surface treatment, without plating, won't produce pollution to the environment.
- 3.Clean and durable:no corrosion, long service life. Clean conveniently, just wipe gently will be bright as new.

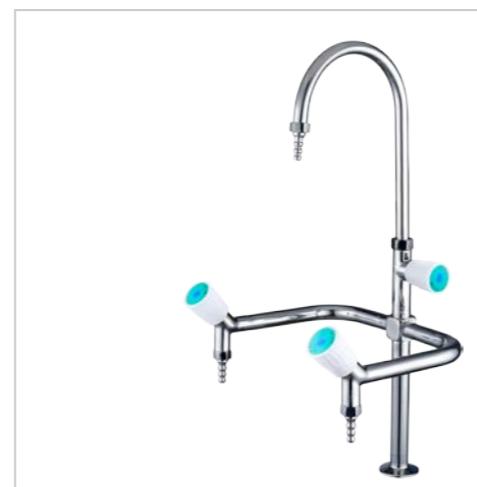


WJH0531A

三联化验水咀 (不锈钢)
Three Way Assay Faucet (Stainless Steel)




WJH0521

双联化验水咀 (不锈钢)
Two Way Assay Faucet (Stainless Steel)




WJH0512

单联化验水咀 (不锈钢)
Single Assay Faucet (Stainless Steel)





WJH0515

单联化验水咀 (不锈钢)
Single Assay Faucet (Stainless Steel)




WJH0531B

三联化验水咀 (脚动、不锈钢)
Three Way Assay Faucet (Swing ,Stainless Steel)

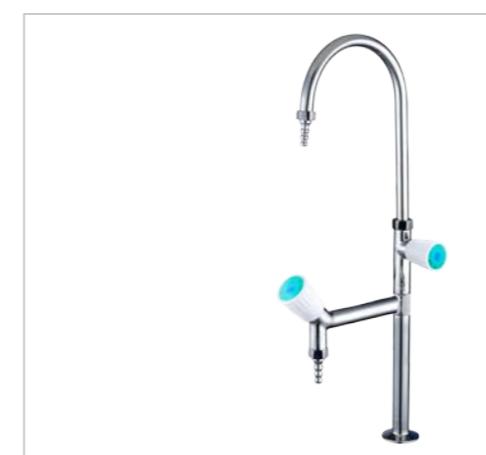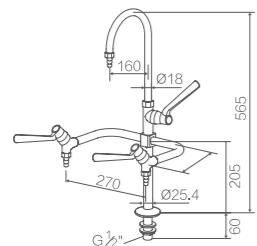


WJH0523

双联化验水咀 (不锈钢)
Two Way Assay Faucet (Stainless Steel)




WJH0522

低双联化验水咀 (不锈钢)
Two Way Assay Faucet (Stainless Steel)




WJH0512A

单联化验水咀 (脚动、不锈钢)
Single Assay Faucet (Swing, Stainless Steel)



WJH0515A

单联化验水咀 (脚动、不锈钢)
Single Assay Faucet (Swing, Stainless Steel)





WJH0233A

三联化验水咀
Three Way Assay Faucet



WJH0233C

三联化验水咀
Three Way Assay Faucet



WJH0211B

单联化验水咀
Single Assay Faucet



WJH0261

六联化验水咀
Six Way Assay Faucet



WJH0233C-1

三联化验水咀
Three Way Assay Faucet






WJH0222

低双联化验水咀
Two Way Assay Faucet



根据德国 DIN Standard 13792:2002 标准 , 旋钮配色表可提供多种颜色的气阀。

According to Germany DIN Standard 13792:2002,color coding can provide multicolor gas valve

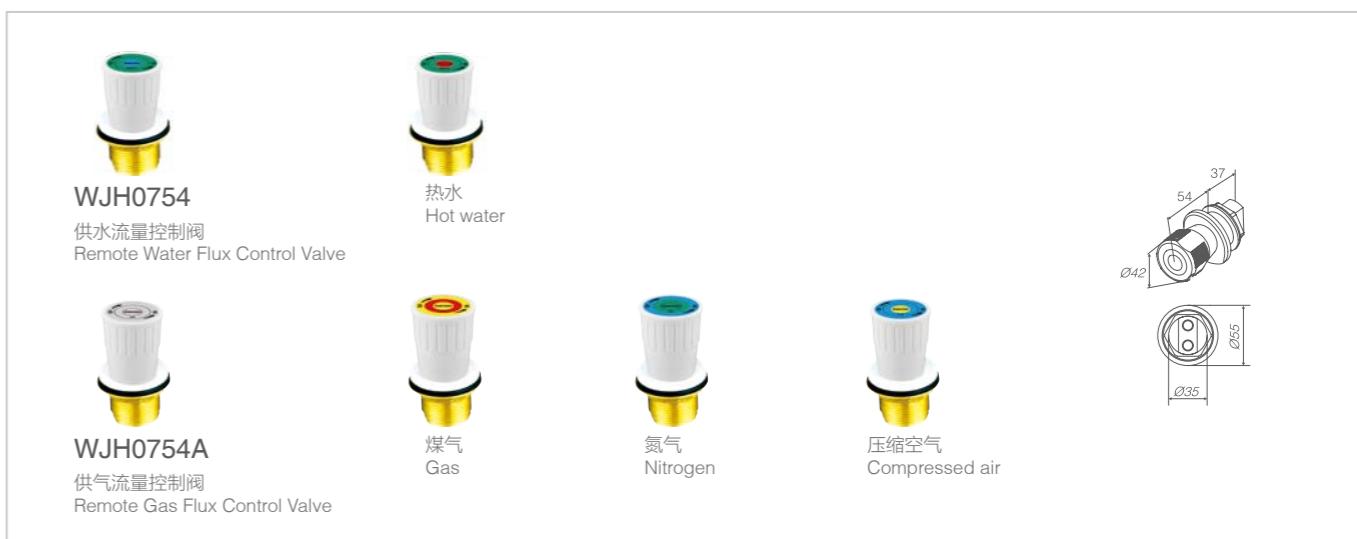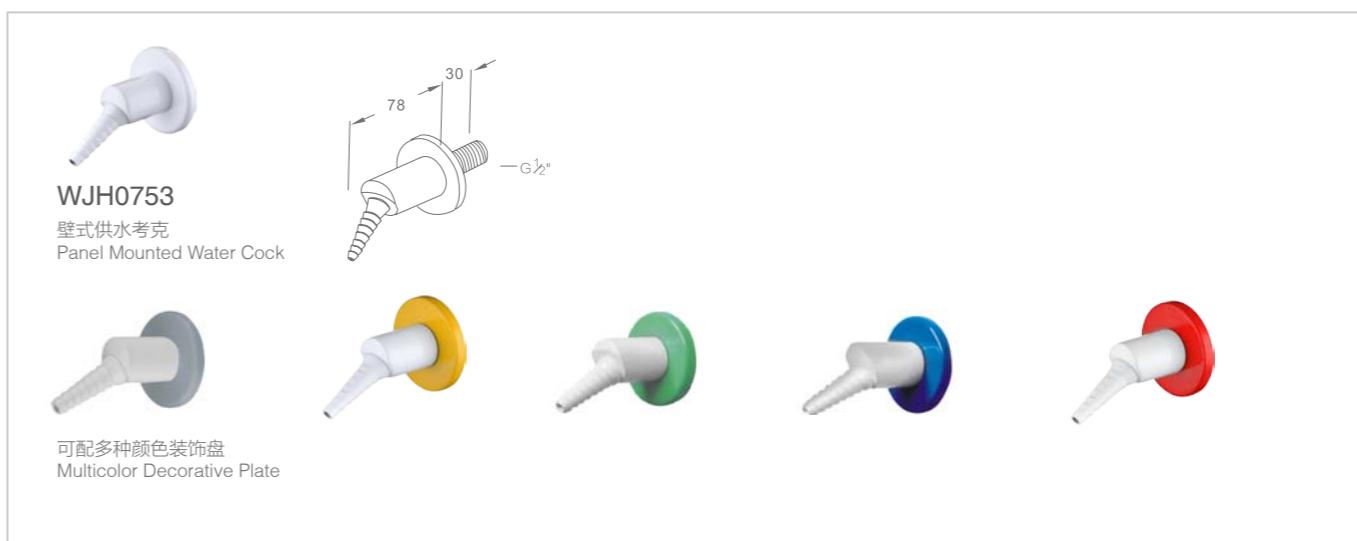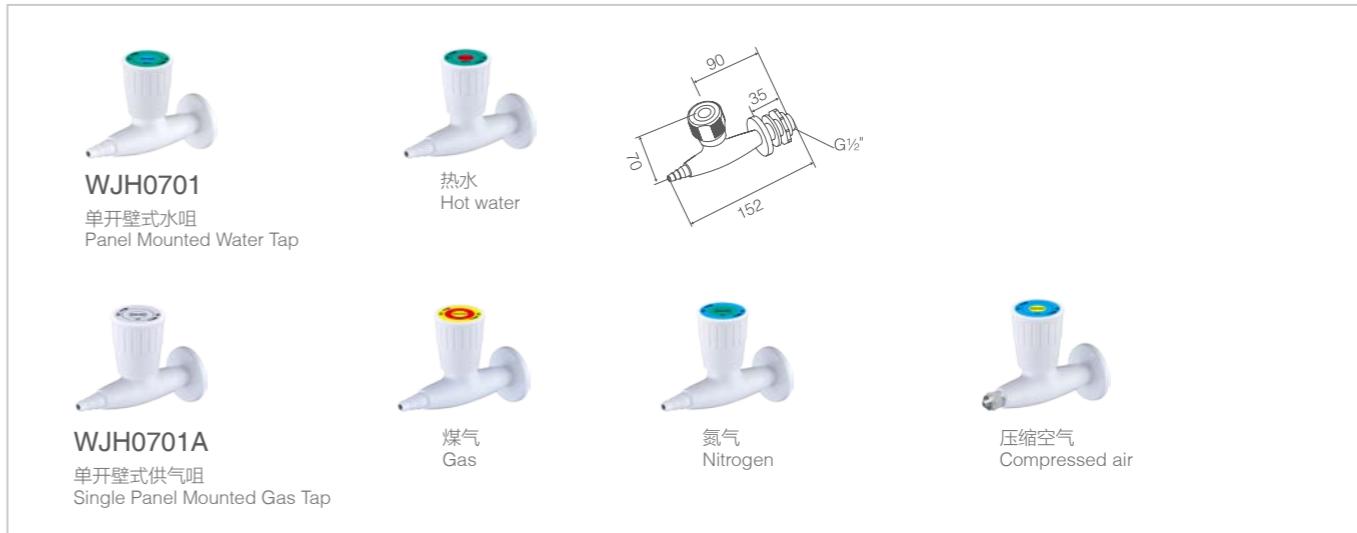




RWD-BUILDING WORLD-CLASS LABORATORIES WITH YOU

全铜精铸 · 高端品质
All Copper Precision Casting, high-End Quality




F1101B
单开壁式水咀
Panel Mounted Water Tap

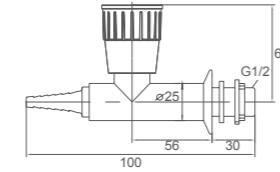

FQ1101B
单开壁式供气咀
Single Panel Mounted Gas Tap




F1101L
单开立式供水咀
Single Erect Water Tap

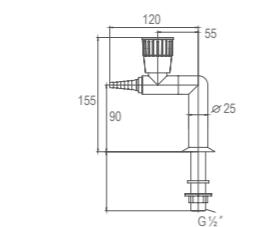

FQ1101L
单开立式供气咀
Single Erect Gas Tap




F2201A
双开立式水咀
Two Way Erect Water Tap

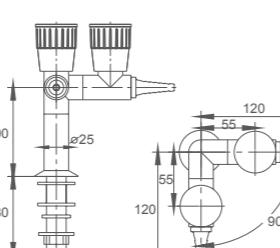

FQ2201A
双开立式供气咀
Two Way Erect Gas Tap




F2202A
双开立式水咀
Two Way Erect Water Tap

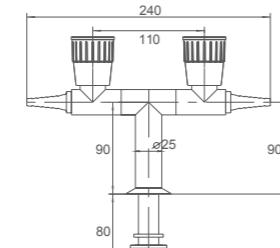


FQ2202A
双开立式供气咀
Two Way Erect Gas Tap





F4401A
四开立式水咀
Four Way Erect Water Tap

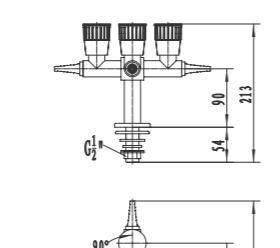


FQ4401A
四开立式供气咀
Four Way Erect Gas Tap

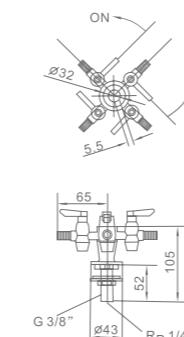


WJH0804A
四开立式供气咀
Four Way Erect Gas Valve

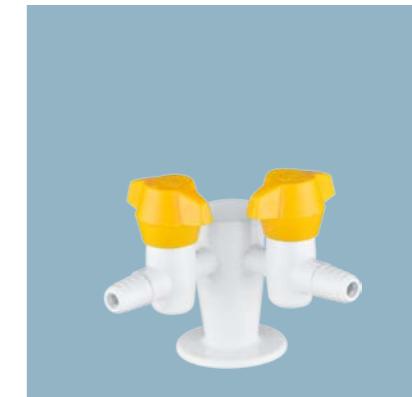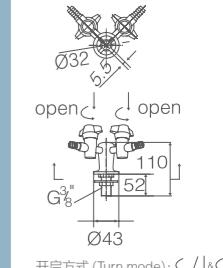


WJH0802AB1
双开立式供气咀 (安全弹扣开启)
Two Way Erect Gas Valve(Safety Press-turn Open)

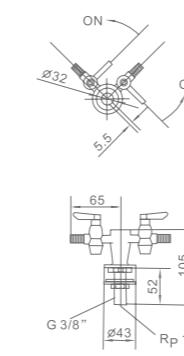

WJH0802AB
双开立式供气咀
Two Way Erect Gas Valve

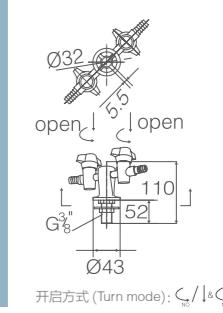

WJH0802AA1
双开立式供气咀 (安全弹扣开启)
Two Way Erect Gas Valve(Safety Press-turn Open)

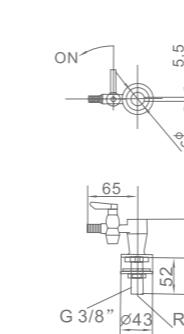


WJH0801A
单开立式供气咀
Single Erect Gas Valve

紧急冲淋洗眼器

紧急冲淋洗眼器是广泛使用于医药、化工、石化、电子、半导体企业中危险工作区域和实验室的紧急救护安全装置。当发生化学液体或者有毒物质喷溅到工作人员身体、脸、眼或发生火灾引起工作人员衣物着火时，该装置能迅速将危害降到最低程度，减少有毒有害物质对工作人员身体伤害。

Emergency Shower & Eye Wash

As first aid equipment, emergency shower and eye wash units are widely used at working area and laboratories in the fields of pharmaceutical, chemical, petrochemical, electronics, semi-conductor industries, where danger tends to occur unexpectedly. In the event of an accident of chemical or poison spill or fire, this equipment delivers water to rinse contaminants from a user's body, face, and eyes, as to minimize damage and harm to injured worker.

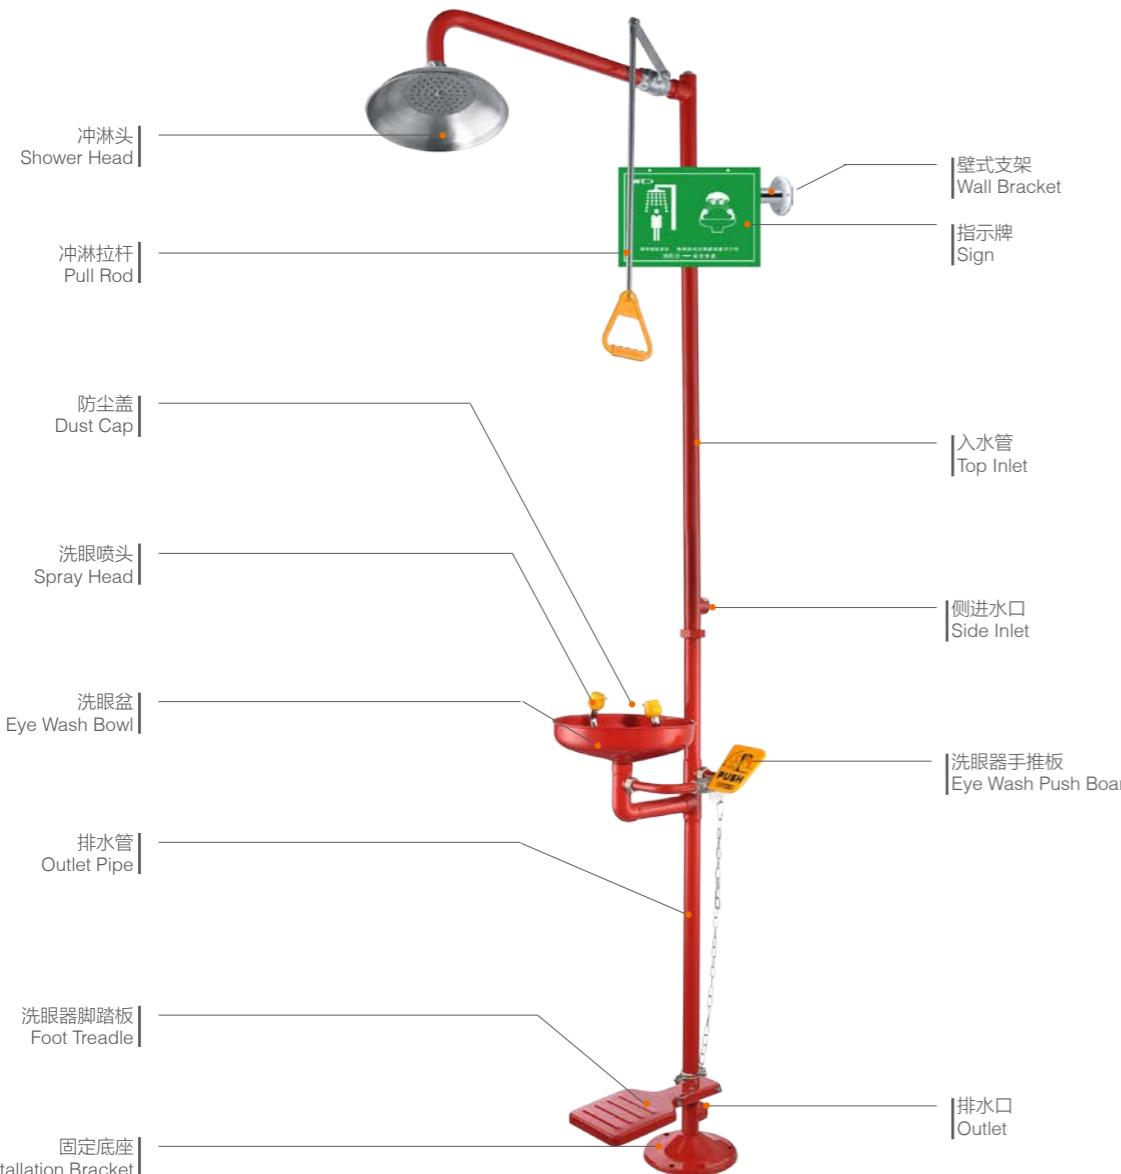

所有紧急冲淋洗眼器均可接受来样定做；RWD 也可根据客户要求，定制不同颜色。


RWD Emergency Shower & Eye Wash can be designed and sampled, also offers customers different colors as customers' request.

RWD 紧急冲淋洗眼器达到 ANSI Z358.1-2014 标准

RWD Emergency Shower & Eye Wash in Accordance with ANSI Z358.1-2014

RWD 紧急冲淋洗眼器采用台湾先进技术，依据美国 ANSI Z358.1-2014 标准生产。该标准中对紧急冲淋洗眼器每个组成部分的长度、高度、水流量、水流在定点高度的截面积等方面都做了详细的规定，RWD 紧急冲淋洗眼器系列均能达到标准。在此之上，RWD 紧急冲淋洗眼器系列洗眼喷头高度与角度完全依照面部比例设计，出水孔经过特殊处理，喷出的水更加温和，使用过程中不会因水流过激伤害眼膜与眼睛内部的神经。

RWD emergency shower and eye wash equipments are manufactured in accordance with ANSI Z358.1-2014 standard, which sets standard for length, height, flow volume and spray area, etc., for emergency equipment. Eye wash is ergonomically designed with two spray heads, height and angle of the heads offer face most comfort. The specially designed spray holes soften water spray and protect eyes effectively.

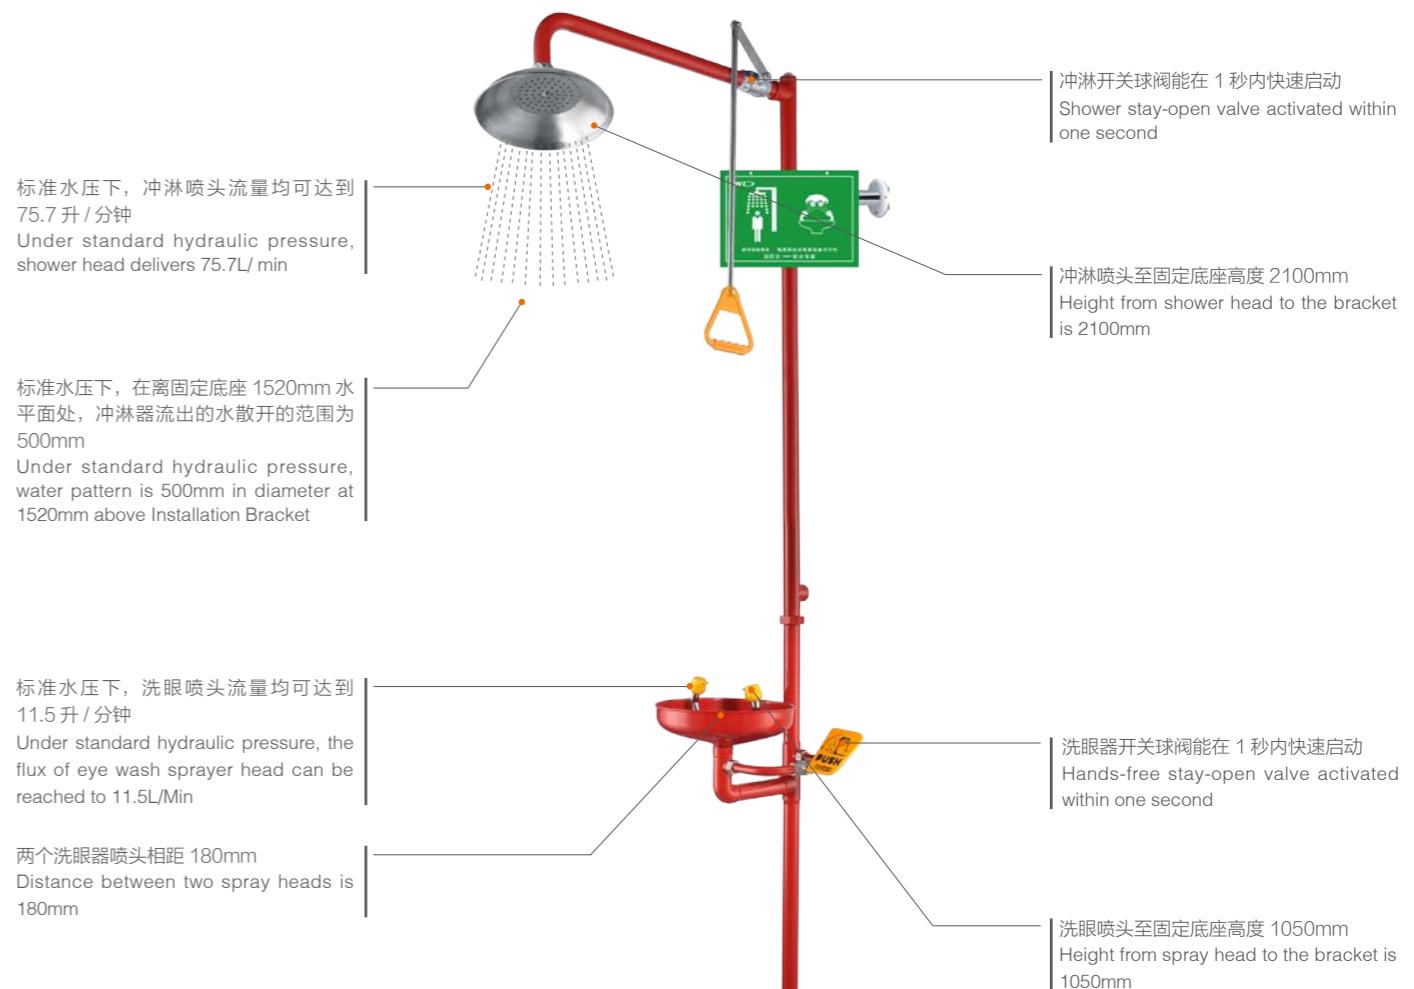

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光, 以增强产品耐腐蚀能力
- 安装特点: 采用“插入式”快接方式, 安装时长较传统洗眼器时长缩短 2/3
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 顶喷: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: ≥ 76 L/min
- 洗脸/洗眼水流量: ≥ 11.4 L/min
- 洗眼流量: ≥ 1.5 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1201mm
- 排水口高度: 86mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1524mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。
可添加不锈钢脚踏板控制洗眼开关。

新品
NEW




- 采用“插入式”管道连接方式, 能快速的装配和拆卸, 方便安装和日常维护。



Adopt UNION type pipe connection, can quickly assemble and disassembled, is easy to install and daily maintenance.

EYE/FACE WASH AND SHOWER COMBINATION STATION

- Material: Stainless Steel 304
 - Surface finishing: fine-polished, which makes the pipe surface performs better on corrosion resistance
 - Assembling feature: pipes connected by innovative inserting & turning
 - Usage : drenching body and rinsing faces / eyes can be operated separately or simultaneously
 - Shower & eye wash switch : SS304 ball valve
 - Shower head : spinning-formed with curled rim, diameter 250 mm
 - Pipe diameter : 38 mm
 - Nominal pressure : 1.0 Mpa
 - Working pressure : 0.2~0.4 Mpa
 - Testing pressure : 1.5 Mpa
 - Temperature requirement on working environment : 0°C~40°C
 - Flow rate of body shower : ≥76 L/min
 - Flow rate of eye/face wash : ≥11.4 L/min
 - Flow rate of eye wash : ≥1.5 L/min
 - Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
 - Dust cover: integrated with the spray head (not connected by chain), and easily removed by water flow.
 - Spray head feature: patented design, each spray head equips with one water-flow control valve
 - Inlet thread : Rp 1" female
 - Outlet thread : Rp 1" female
 - Inlet height (from above the floor) : 1201 mm
 - Outlet height (from above the floor) : 86 mm
 - Distance between spray heads : 170 mm
 - Water pattern coverage : at the height of 1524 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter
- ★ Notes : the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end;
stainless steel – made foot treadle is optional as eye wash switch

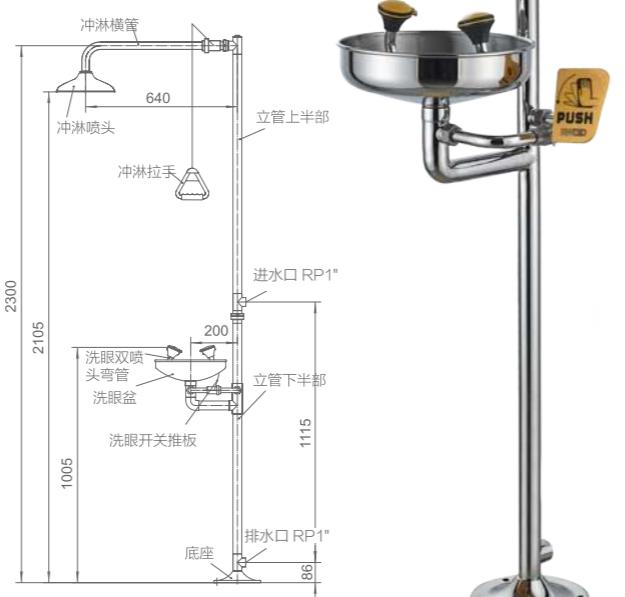

WJH0358A-3

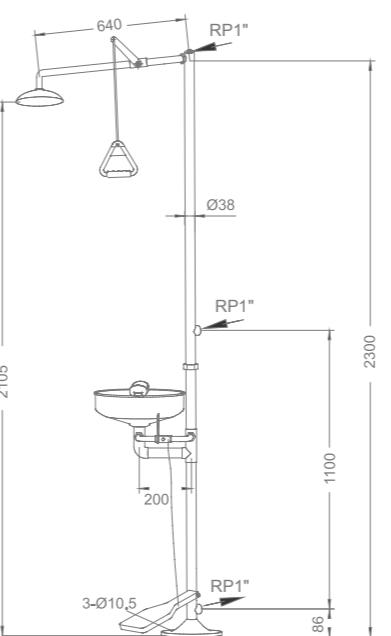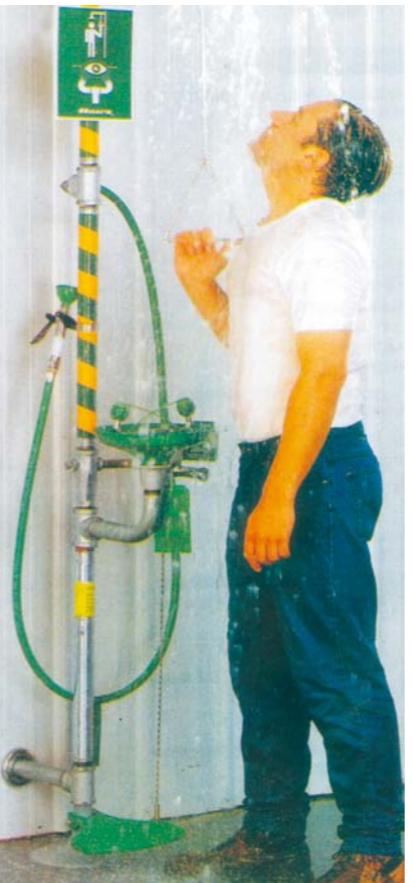

- 采用“由式”管道连接方式, 能快速的装配和拆卸。
Adopt UNION type pipe connection, can quickly assemble and disassembled, is easy to install and daily maintenance.


WJH0858 (抛光)
不锈钢紧急冲淋洗眼器
Stainless Steel Emergency Shower & Eye Wash

接墙式冲淋洗眼器

- 狭窄的作业空间及实验室更加需要提高空间的利用率，挂壁式洗眼器不占地面空间，使用简单、方便
- 喷头：冲淋，洗眼器喷头水流充足，安装方便，节省使用空间
- 管道：主体管道不锈钢材质，确保产品的坚固与质量，抗腐蚀
- 开关：标明操作图示及文字说明的标牌置于手拉开关的附近，使用简单
- 注明：洗眼停止使用后，管道内积水自动排空，达到防冻目的

WALL MOUNTED SHOWER & EYE WASH

- Limited working space and laboratory more need to advance the rate of using, the wall mounted eye wash is cabinet and convenient
- Sprayer: the flux of sprayer head and shower head is ample, installing conveniently, saving space
- Tube: the body of tube is made of stainless steel, make sure the products firm and high quality, be resistant to the chemicals
- Switch: the sign of operation is near by the knob, operate simply
- Note: After washing the eyes, the pipe of water can empty automatically to achieve preventing frostbite

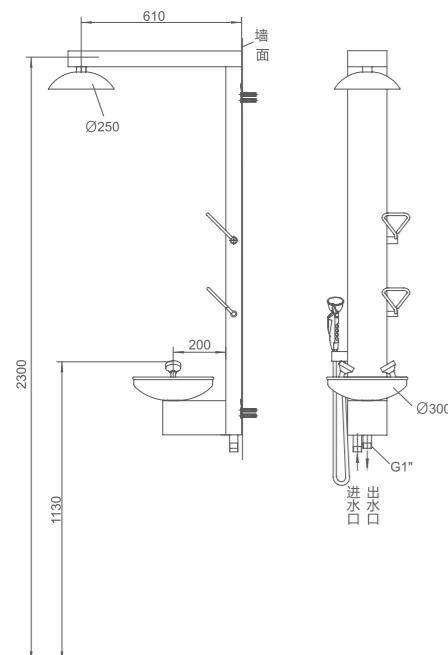

WJH1558 (定制产品)
不锈钢紧急冲淋洗眼器（壁挂式）
Stainless Steel Emergency Shower&Eye Wash (wall hung design)



台式洗眼器

- 主体：加厚铜质
- 涂层：高亮度超厚电镀层，耐腐蚀、耐热，防紫外线辐射
- 喷淋头：柔软橡胶，出水经缓压处理呈泡沫状水柱，防止冲伤眼睛
- 防尘盖：PP 材质，使用时自动被水冲开
- 开关：水流开启、水流锁定功能一次完成，方便使用
- 控水阀：止逆阀，其阀门可自动关闭
- 软管：供水软管长度 1.5 米，软性 PVC 管外覆不锈钢网
- 水压：最大耐水压 7 巴
- 选择：1.可供台式 / 壁式安装方式 2.可供单 / 双喷淋头 3.可供洗瓶器


BENCH REMOVABLE EYE WASH

- Body: Solid brass
- Coating: High gloss epoxy powder, resistant to chemicals, UV fading and heat
- Spray head: Soft rubber, softend water spray for eye protection
- Dust cap: PP, removed automatically when eye wash is operated
- Switch: Automatic trigger locking for easy hand-free use
- Valve: None-return valve, shut off automatically
- Hose: Length 1.5m, PVC with stainless steel wire braided
- Max: working pressure: 7 Bar
- More options: 1. Desk/wall mounted available
2. Single/double spray head(s) available
3. Bottle wash available


新品
NEW



WJH0355A
台式移动双口洗眼器
Removable Double Nozzle Eye Wash(table mounted)



WJH0355B
台式移动单口洗眼器
Removable Single Nozzle Eye Wash(table mounted)

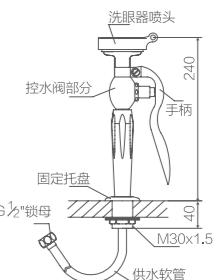

RWD 台面防溢盛装盘

- 材质:聚乙烯白色
- 尺寸:30.5cm 宽 × 43cm 长 × 10cm 高
- 负载能力: 91kg 载重能力
- 污水容量: 5.6L 污水容量
- 重量: 2.27 公斤

产品描述

- 耐化学性盛装盘设计了内置盛装结构
- 喷嘴方便排出漏液
- 半透明的侧壁有助于发现泄漏
- 体积小, 放在任何桌面或台面上

RWD Table anti overflow laying tray

- Material:polyethylene white
- Measure(cm):30.5(W)*43(L)*10(H)
- Load capacity:91KG
- Sewage capacity:5.6L
- Net Weight:2.27KG



WJH0361


台面防溢盛装盘
Table anti overflow laying tray

滴水架

- 材质:高密度 PP / 不锈钢
- 类型:单面 / 双面, 底部托盘中间设有排水孔, 可拆卸式滴水棒, 方便使用
- 安装方式:壁挂式 / 台式

PEGBOARD


- Material:High grade PP/Stainless steel
- Type:Single faced/double faced. Tray hole for water drainage
detachable peg,convenient for use
- Installation:Panel mounted/desk mounted

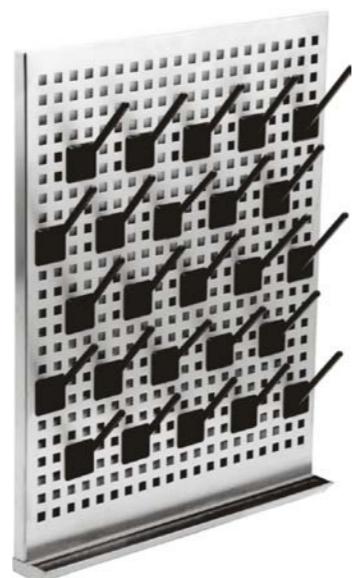

WJH0360 (420x550x55)

可调式滴水架 (不锈钢)
Adjustable pegboard (Stainless Steel)

(可定做多种尺寸)
(Made to order in several of measures)

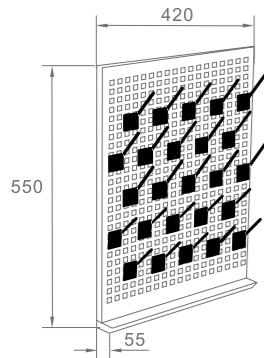

滴水架选用高品质塑料, 具有优越的耐候性与抗菌腐蚀性; 整体不霉变, 滴水棒就位后不易脱落。安装简便; 无论是固定在墙面还是实验台上都坚固耐用

- 配备 80 个滴水棒, 包含 60 个标准滴水棒 (直径 15mm) 和 20 个细小滴水棒 (直径 6mm) 具有锁扣功能, 承重强度高
- 滴水棒的使用可根据器皿的实际大小放置, 拆卸方便
- 支架底部设有无缝排水孔, 倾斜的设计能够迅速排走液体
- 排液管可连接至积液槽排液口
- 配套安装固定套件
- 72 个插孔位


台式安装 Bench Installation



FJ5304AA

双面可调滴水架
Double faces adjustable pegboard

新品
NEW

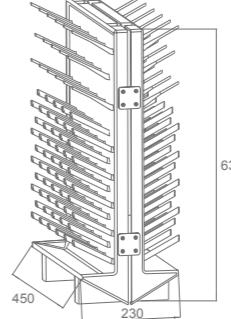

FJ5304A

单面可调滴水架 (有背板)
Single face adjustable pegboard(With Back board)




壁式安装 Wall mounted Installation



FJ5304ALG

单面可调滴水架
Single face adjustable pegboard

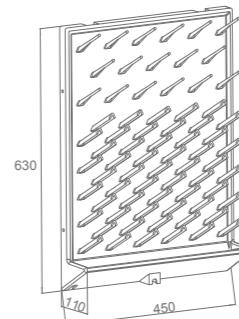


FJ5304AW

单面可调滴水架
Single face adjustable pegboard



WJH0362A

PP 单面可调滴水架 (灰色)
PP Single face adjustable pegboard(grey)

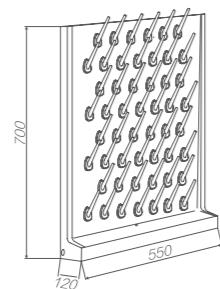


WJH0362C

PP 单面可调滴水架 (黑色)
PP Single face adjustable pegboard(black)



WJH0362AA

PP 双面可调滴水架 (灰色)
PP Double faces adjustable pegboard(grey)

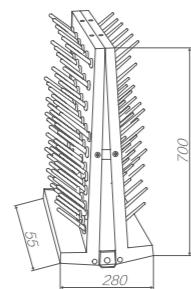


WJH0362CC

PP 双面可调滴水架 (黑色)
PP Double faces adjustable pegboard(black)



WJH0362B

PP 单面可调滴水架 (灰色)
PP Single face adjustable pegboard(grey)

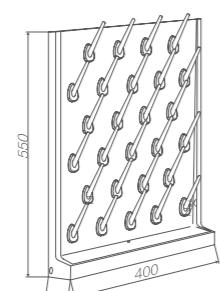


WJH0362D

PP 单面可调滴水架 (黑色)
PP Single face adjustable pegboard(black)



WJH0362BB

PP 双面可调滴水架 (灰色)
PP Double faces adjustable pegboard(grey)

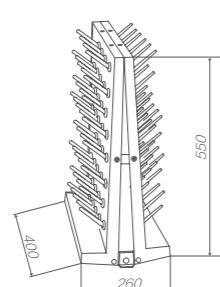

WJH0362DD

PP 双面可调滴水架 (黑色)
PP Double faces adjustable pegboard(black)

- 采用高品质 PP 新料注塑成型，致密性高，稳定性强，并具备弹性，韧性，不易老化，变形。
Sink,Which is injection molded and made of high grade PP fresh material,is of high density,stability and elasticity,Also it is aging resistant.
- 首创 PP 过滤提笼，可解决杂质堵塞管道及不易清洁的问题。
Innovative PP basket trap solves the jamming problem caused by impurities.
- 标配附件：高强度 PP 去水，含阻水盖、PP 过滤提笼。
Accessories:High grade PP overflow, including stopper and basket trap.



WJH0356H (浅灰)

PP 壁式水槽
Wall Mounted PP sink
内尺寸: 285*90*105
外尺寸: 300*118*111



WJH0356H (黑)

PP 壁式水槽
Wall Mounted PP sink
内尺寸: 285*90*105
外尺寸: 300*118*111



PJ-003A

PP 下水管
PP downcomer



PJ-004A

PP 防虹吸瓶式存水器 (P形)
PP Bottle Trap



WJH0357AY



PP 中水槽
PP Mid-sized Sink
内尺寸: 390*290*260
外尺寸: 440*340*270

PP 大水槽 (防溢水功能)

- 颜色: 黑、白、灰
- 材质: 高密度 PP, 耐强腐蚀及有机溶剂, 如王水
- 表面纹理: 槽沿表面处理为皮纹, 耐刻刮, 与大部分台面板表面纹理一致
- 溢水装备: 与水槽主体模具注塑一体成型, 很好地满足实验室洗涤需求
- 附件: 高密度 PP 阻水盖、溢水盖和连接链

PP Big Sink (anti-overflow design)

- Color: Black, white, grey.
- Material: High grade PP, resistant to most chemicals and organic solvent, such as Aqua Regia.
- Finish: Matt finish on lip, resistant to scratch & consistent with most worktop finish.
- Overflow: Injection molded as one-piece part of sink body.
- Accessories: High grade PP Drainage cap, Overflow cap, Link chain.



WJH0357CY
PP 大水槽 (防溢水功能)
PP Big Sink
(anti-overflow design)
内尺寸 / Inside size: 820*440*300
外尺寸 / Outside size: 900*520*300

新品
NEW



PP 中水槽 (防溢水功能)

- 颜色: 黑、白、灰
- 材质: 高密度 PP, 耐强腐蚀及有机溶剂, 如王水
- 表面纹理: 槽沿表面处理为皮纹, 耐刻刮, 与大部分台面板表面纹理一致
- 溢水装备: 与水槽主体模具注塑一体成型, 很好地满足实验室洗涤需求
- 附件: 高密度 PP 阻水盖、溢水盖和连接链

PP 中水槽 (防溢水功能)

- Color: Black, white, grey.
- Material: High grade PP, resistant to most chemicals and organic solvent.
- Finish: Matt finish on lip, resistant to scratch & consistent with most worktop finish.
- Overflow: Injection molded as one-piece part of sink body.
- Accessories: High grade PP Drainage cap, Overflow cap, Link chain.



新品
NEW



可拆卸防溢塞
Removable anti-overflow stopper

WJH0357E1

- PP 中水槽 (防臭功能)
PP Mid-sized Sink
(deodorization design)
内尺寸: 490*390*290
外尺寸: 550*455*310



WJH0357EY2

- PP 中水槽 (防溢水、防臭功能)
PP Mid-sized Sink
(anti-overflow / deodorization design)
内尺寸: 490*390*290
外尺寸: 550*455*310



新品
NEW



新品
NEW




WJH0357EY3

- PP 中水槽 (防溢水功能)
PP Mid-sized Sink
(anti-overflow design)
内尺寸 / Inside size: 620*440*280
外尺寸 / Outside size: 700*520*374



WJH0357EY4


- PP 中水槽 (防溢水功能)
PP Mid-sized Sink
(anti-overflow design)
内尺寸 / Inside size: 490*390*290
外尺寸 / Outside size: 550*450*310

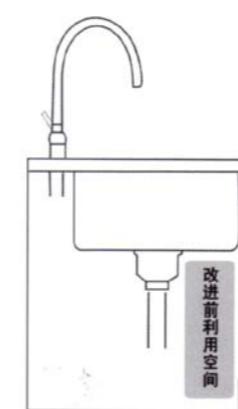

Using space before improvement



Using space after improvement

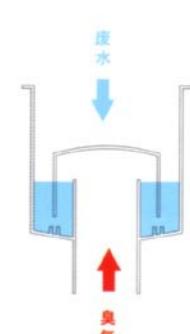

下水防臭示意图
Schematic diagram of water deodorization
下水结构
downcomer structure





WJH0356
PP 小水槽
PP Cup Sink
内尺寸: 160*100*106
外尺寸: 198*138*110



WJH0356A
PP 小水槽
PP Cup Sink
内尺寸: 218*115*122
外尺寸: 251*148*125



WJH0356B
PP 小水槽
PP Cup Sink
内尺寸: 218*115*122
外尺寸: 251*148*125



WJH0356C
PP 小水槽
PP Cup Sink
内尺寸: 217*97*150
外尺寸: 258*138*154

PP 水槽 / 杯槽

- 颜色: 黑、白、灰
- 材质: 高密度 PP, 耐强腐蚀
- 表面纹理: 槽沿表面处理为皮纹, 耐刻刮, 与大部分台面板表面纹理一致
- 附件: 高密度 PP 去水、滤片和阻水盖

PP SINK/CUP SINK

- Color:black,white,gray
- Material:high grade polypropylene,resistant to most chemicals
- Finish:leather finish on lip,resistant to scratch&consistent with most of worktops'finish
- Accessories:high grade PP overflow,filter&stopper



WJH0357C
PP 大水槽
PP Big Sink
内尺寸: 740*400*310
外尺寸: 800*460*325




WJH0356E
PP 小水杯
PP Cup Sink
内尺寸: 84*120
外尺寸: 118*190



WJH0356F
PP 小水杯
PP Cup Sink
内尺寸: 155*125
外尺寸: 185*220



WJH0357A
PP 中水槽
PP Mid-sized Sink
内尺寸: 380*270*260
外尺寸: 440*340*275

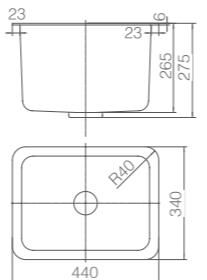

WJH0357B
PP 中水槽
PP Mid-sized Sink
内尺寸: 490*390*290
外尺寸: 550*450*310



WJH0357E
PP 中水槽
PP Mid-sized Sink
内尺寸: 490*390*290
外尺寸: 550*450*310



WJH0357F
PP 中水槽
PP Mid-sized Sink
内尺寸: 490*390*290
外尺寸: 550*450*310



PJ-001
PP 下水管存水器 (S形)
PP downcomer and trap



PJ-002
PP 下水管存水器 (S形)
PP downcomer and trap



PJ-003
PP 下水管
PP downcomer



PJ-004
PP 防虹吸瓶式存水器 (P形)
PP Bottle Trap



PJ-005
PP 防虹吸瓶式存水器 (P形)
PP Bottle Trap



PJ-006
PP 下水器
PP Drainer



PJ-007
PP 提笼
PP Drainer



PJ-008
PP 下水口盖
PP Drainer



WJH0357
PP 中水槽
PP Mid-sized Sink
内尺寸: 380*270*180
外尺寸: 440*330*200



WJH0357D
PP 中水槽
PP Mid-sized Sink
内尺寸: 380*270*180
外尺寸: 440*330*200



WJH0357G
PP 六角水槽
PP Six corner Sink
内尺寸: 410*410*320
外尺寸: 470*470*320

不锈钢水槽系列

主体: 304 不锈钢

属性: 无需开模, 纯手工制作, 可生产任何尺寸

STAINLESS STEEL SINK

Body: 304 Stainless steel

Property: Purely handmade, without moulding and can do any size



WJH1357

外尺寸 :588x461x228mm
内尺寸 :533x406x228mm



WJH1357A

外尺寸 :600x500x250mm
内尺寸 :520x420mm







WJH1357B

外尺寸 :802x458x228mm
内尺寸 :744x400x228mm



WJH1357C

外尺寸 :813x457x255mm
内尺寸 :762x406x255mm

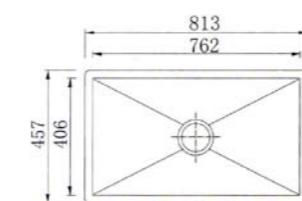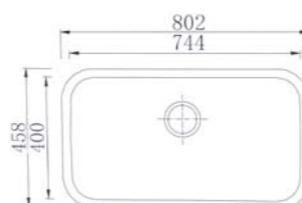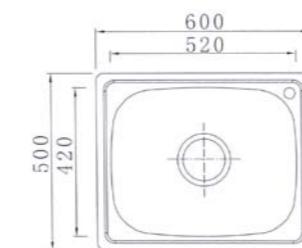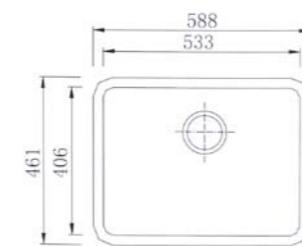

万向抽气罩 (吸顶式、壁式)

- 关节: 高密度 PP 材质, 可 360° 旋转调节方向, 易拆卸、重组及清洗
- 关节密封圈: 不易老化之高密度橡胶
- 支撑弹簧 / 关节连接杆: 304 不锈钢
- 关节松紧旋钮: 高密度 PP 制成, 内嵌铜质螺母, 与关节连接杆锁合
- 气流调节阀: 手动调节外部阀门旋钮, 控制进入之气流量
- 拱形 / 杯形集气罩: 直径 375mm/200mm, 高密度 PP 制成, 红色、灰色和透明三种选择
- 伸缩导管: 直径 110mmPVC
- 固定架: 高密度 PP 材质 (吸顶式 / 壁式)

FUME EXHAUST(CEILING/WALL)

- Joint:High grade PP,to be 360° swiveled,dismantled & assembled easily for cleaning
- Joint seal ring:low-friction treated rubber
- Support spring/center bolt:Stainless steel 304
- Adjustable joint knob:High grade PP with a molded-in brass nut locking with center bolt
- Damper:To manually adjust airflow by a knob
- Dome/cup hood:D375mm/200mm,high grade PP red,gray & transparent available
- Tube:D110mm PVC
- Bracket:High grade PP(ceiling/wall mounted)



WJH0604B-1

万向壁式抽气罩 (三节)
Ceiling Fume Exhaust(3 Joint)



WJH0604B

万向顶式抽气罩 (三节)
Ceiling Fume Exhaust(3 Joint)

铝合金三节万向抽气罩

- 关节: 高密度 PP 材质, 可 360° 旋转调节方向, 易拆卸、重组及清洗。
- 关节及密封圈: 不易老化之高密度橡胶
- 关节连接杆: 304 不锈钢
- 关节松紧旋钮: 高密度 PP 材质, 内嵌不锈钢轴承, 于关节连接杆锁合
- 气流调节阀: 手动调节外部阀门旋钮, 控制进入之气流量
- 拱形 / 杯形集气罩: 高密度 PP/PC 材质
- 伸缩导管: 75mm 铝合金管 /PP 管 /PVC 管
- 独有 360° 旋转装置: 以固定架为中心最大活动半径可达 1600mm
- 固定底座: 非粘接而成, 模具注塑一体成型, 牢度强, 不脱底。



Aluminium Alloy 3 Joints Fume Extractor

- Joint: high grade PP, to be 360° swiveled, easy to dismantle, assemble & clean
- Sealing ring: low-friction treated rubber
- Center bolt: 304 stainless steel
- Adjustable joint knob: High grade PP, embedded stainless steel bearing, locked lever in joints.
- Air flow control valve: adjust the external valve knob manually to control the entering of the gas flow
- Arch/Cup gas-collecting hood: high density PP/PC material
- Tube: 75mm aluminum alloy
- Unique 360°rotary device: with a fixed frame as the center, radius of activities is 1600 mm
- Installation bracket: injection of plastics from a complete mold, mounting panel strongly connected to the joint



WJH0607-3L

万向顶式抽气罩 (三节, 铝合金)
Aluminium Alloy 3 Joints Fume Extractor

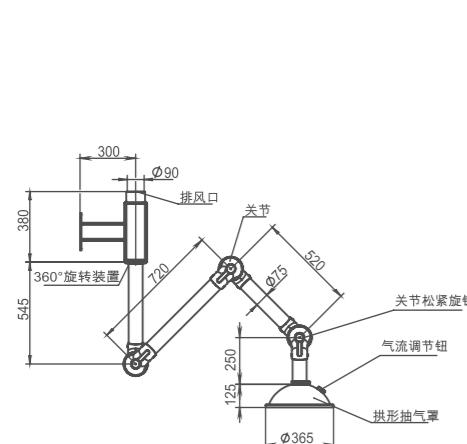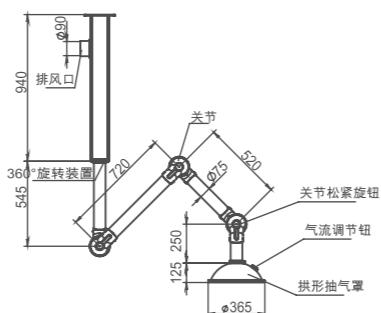

WJH0607-3B

万向壁式抽气罩 (三节, 铝合金)
Aluminium Alloy 3 Joints Fume Extractor wall type

铝合金三节万向抽气罩

- 关节: 高密度 PP 材质, 可 360° 旋转调节方向, 易拆卸、重组及清洗。
- 关节及密封圈: 不易老化之高密度橡胶
- 关节连接杆: 304 不锈钢
- 关节松紧旋钮: 全铜材质, 内嵌不锈钢轴承, 于关节连接杆锁合
- 气流调节阀: 手动调节外部阀门旋钮, 控制进入之气流量
- 拱形 / 杯形集气罩: 高密度 PP/PC 材质
- 伸缩导管: 75mm 铝合金管 /PP 管 /PVC 管
- 独有 360° 旋转装置: 以固定架为中心最大活动半径可达 1600mm
- 固定底座: 非粘接而成, 模具注塑一体成型, 牢度强, 不脱底。


Aluminium Alloy 3 Joints Fume Extractor

- Joint: high grade PP, to be 360° swiveled, easy to dismantle, assemble & clean
- Sealing ring: low-friction treated rubber
- Center bolt: 304 stainless steel
- Adjustable joint knob: brass material, embedded stainless steel bearing, locked lever in joints.
- Air flow control valve: adjust the external valve knob manually to control the entering of the gas flow
- Arch/Cup gas-collecting hood: high density PP/PC material
- Tube: 75mm aluminum alloy
- Unique 360°rotary device: with a fixed frame as the center, radius of activities is 1600 mm
- Installation bracket: injection of plastics from a complete mold, mounting panel strongly connected to the joint




WJH0607-3

万向顶式抽气罩 (三节, 铝合金)
Aluminium Alloy 3 Joints Fume Extractor

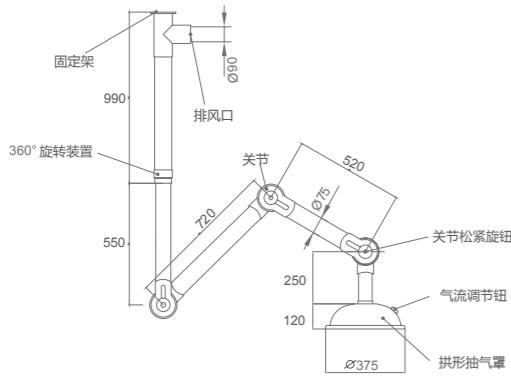

WJH0607-1

万向顶式抽气罩(三节)
Ceiling Fume Exhaust (3 Joint)

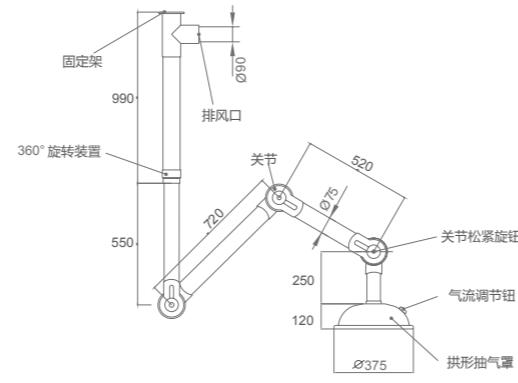

WJH0607-2

万向顶式抽气罩(三节)
Ceiling Fume Exhaust (3 Joint)

万向抽气罩(吸顶式、壁式)

- 关节: 高密度 PP 材质, 可 360° 旋转调节方向, 易拆卸、重组及清洗
- 关节密封圈: 不易老化之高密度橡胶
- 支撑弹簧 / 关节连接杆: 304 不锈钢
- 关节松紧旋钮: 高密度 PP 制成, 内嵌铜质螺母, 与关节连接杆锁合
- 气流调节阀: 手动调节外部阀门旋钮, 控制进入之气流量
- 拱形 / 杯形集气罩: 直径 375mm/200mm, 高密度 PP 制成, 红色、灰色和透明三种选择
- 伸缩导管: 直径 75mmPVC / PP
- 固定架: 高密度 PP 材质 (吸顶式 / 壁式)


FUME EXHAUST(CEILING/WALL)

- Joint:high grade PP,to be 360° swiveled,dismantled & assembled easily for cleaning
- Joint seal ring: High-density anti-aging rubber
- Support spring/center bolt:stainless steel 304
- Adjustable joint knob:high grade PP with a molded-in brass nut locking with center bolt
- Air flow control valve: adjust the external valve knob manually to control the entering of the gas flow
- Dome/cup hood:D375mm/200mm, high grade PP red, grey & transparent available
- Rigid Flexible Duct:D75mm PVC/PP
- Bracket:high grade PP (ceiling/wall mounted)



WJH0604A

万向顶式抽气罩(三节)
Ceiling Fume Exhaust(3 Joint)

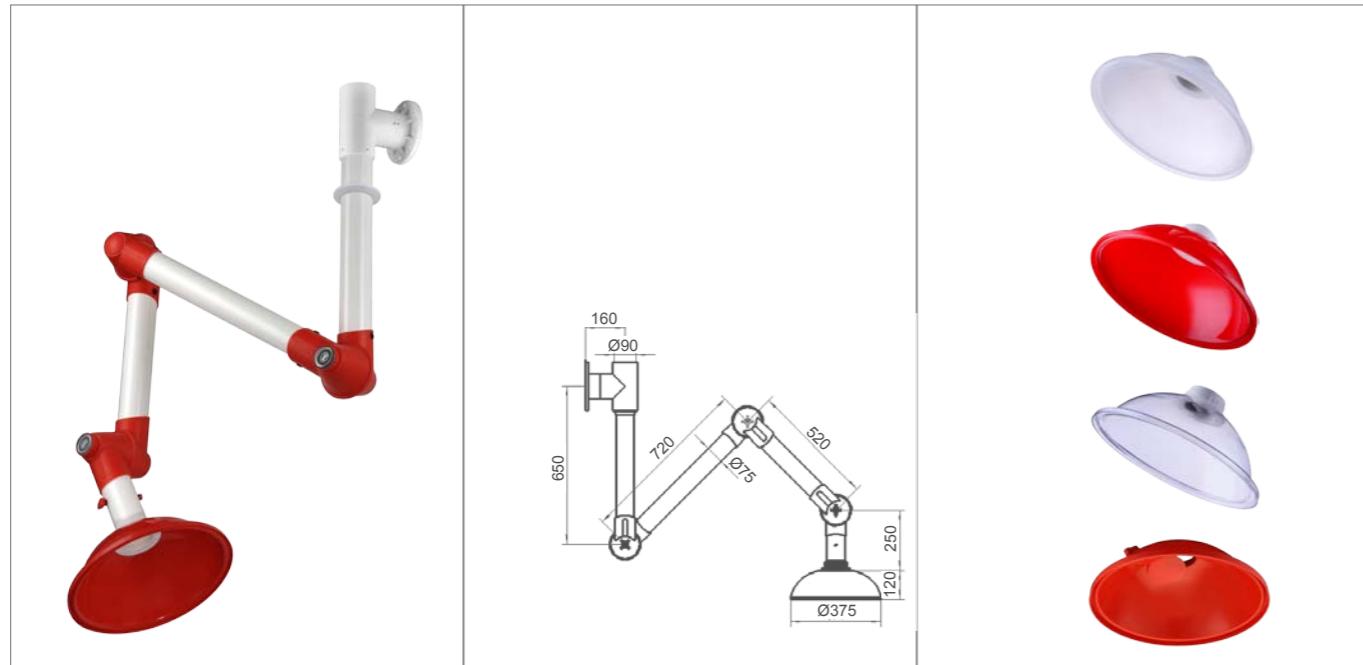


新型万向抽气罩

- 关节: 高密度不锈钢丝与进口尼龙制造, 可随意调整角度, 易拆卸、清洗
- 管体: 采用合金材料制造, 美观大方
- 调控装置: 采用气动撑杆控制高度, 内外合金管伸缩控制长度
- 气流调节阀: 手动调节外部阀门旋钮, 控制进入之气流量
- 气流拱形集气罩: 高密度 PP/PC 材质
- 旋转装置: 安装 360° 旋转装置, 以固定架为中心, 最大活动半径可达 1250mm
- 固定底座: 模具注塑一体成型, 牢度强, 不脱底。


FUME EXHAUST


- Joint: Made of high-strength stainless steel wire and imported nylon, to be 360° swiveled, easy to dismantle and clean.
- Tube body: Made of alloy material, very elegant.
- Controls: Using pneumatic jackstay to control the height, inside and outside alloy tube flex to control the length
- Damper: manually adjusting the outside valve knob and control the entered air flow.
- Dome hood: High Grade PP/PC.
- Swing device: Install a 360° rotary device, with a fixed frame as the center, radius of activities is 1250mm
- Installation bracket: injection of plastics from a complete mold, mounting panel strongly connected to the joint

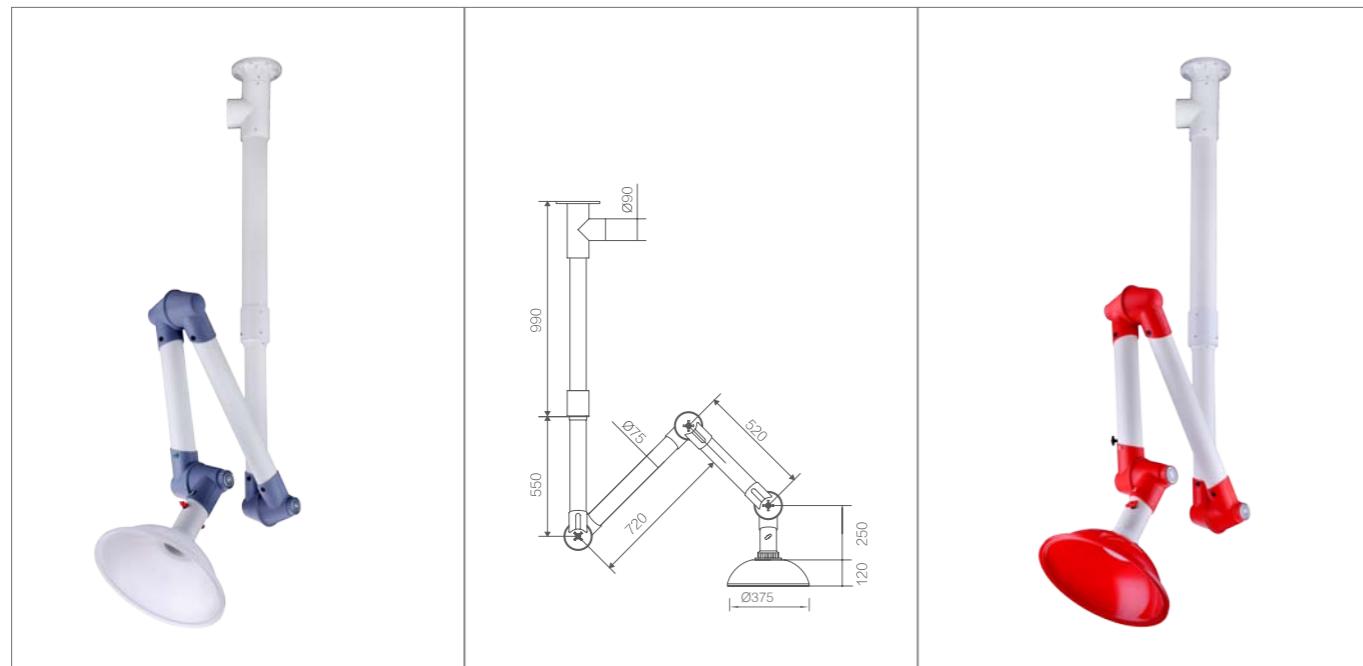

WJH0604

万向顶式抽气罩（三节）
Ceiling Fume Exhaust (3 Joint)

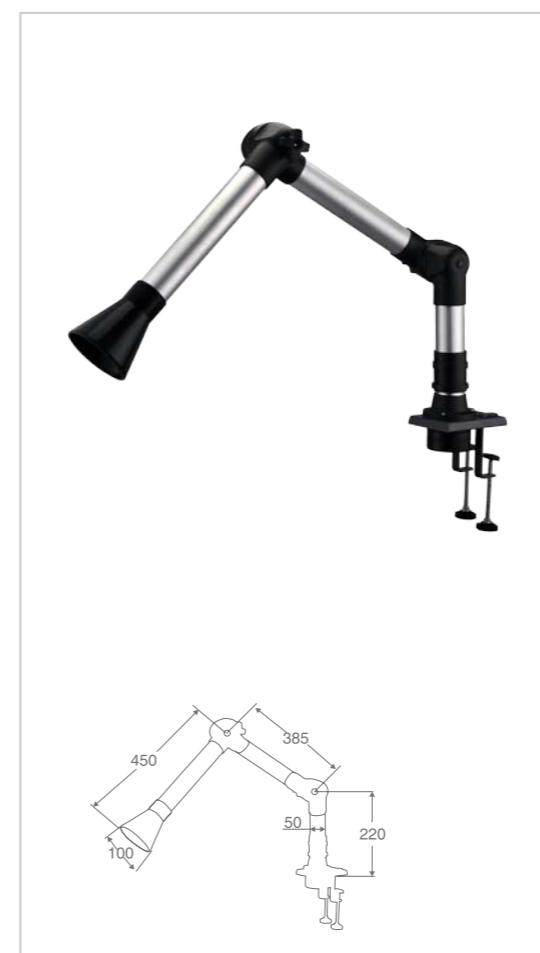

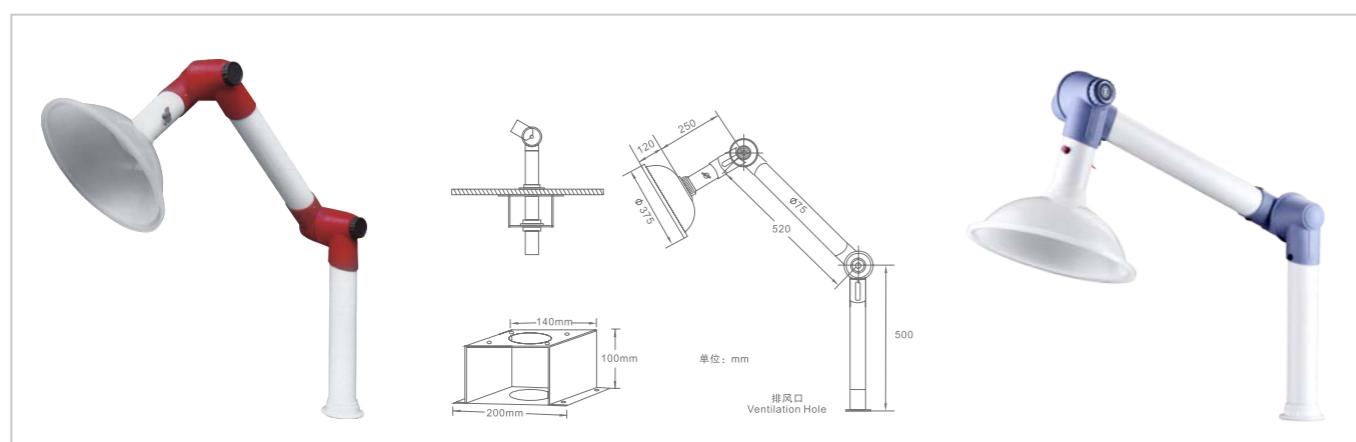

管道风机 RWD 系列

- 双速电机，同时配备热过载保护，所有电机采用电子式或自动调压式速度控制
- 已安装电机及混流桨叶，合理组装，在低噪音情况下具有较高风量
- 叶片采用强力 ABS 塑料，250 型及 315 型采用电镀钢材
- 专为管道通风而设计
- 尺寸由 100mm 至 315mm，风量由 $130\text{m}^3/\text{h}$ 至 $2000\text{m}^3/\text{h}$ ，最大运行温度为 40°C

RWD Pipe Fan Series

- Two-speed motor, equipped with thermal overload protection at the same time, all motor adopts electronic or automatic regulating speed control
- Installed motors and mixed flow blade, a reasonable assembly, under the condition of low noise with high air volume
- Blade adopts strong ABS plastic, type 250 and 315 type using galvanized steel
- Specially designed for ventilation pipe
- Size from 100 mm to 315 mm, the air volume from $130\text{m}^3/\text{h}$ to $2000 \text{m}^3/\text{h}$, maximum operating temperature of 40°C



单位: mm											
Model	A	ΦB	C	ΦD	E	F	G	H	J	kg	
MTD100/2	303	176	115	97	100	90	80	60	188	2.00	
MTD125	258	176	115	123	100	90	80	60	188	2.00	
MTD160	275	200	127	157	112	130	80	60	212	4.90	
MTD200	302	217	141	198	124	140	100	94	232.5	4.90	
MTD250	386	272	192	248	155	168	145	140	291	9.40	



PP 一次性注塑成型通风柜独立风机 (离心式)		
名称	实验室通风系统专用风机	
型号	FF-250	功率
电压	交流 220V	频率
静压	290pa	噪音
转速	2800 转 / 分	排风口径
风量	$2300\text{m}^3/\text{h}$	





PP 通风柜独立风机 (立式)		
名称	实验室通风系统专用风机	
型号	FF-250	功率
电压	交流 220V	频率
静压	90pa	噪音
转速	1450 转 / 分	排风口径
风量	$1850\text{m}^3/\text{h}$	工作方式





Gas-collecting Hood (Special for fume Hood)

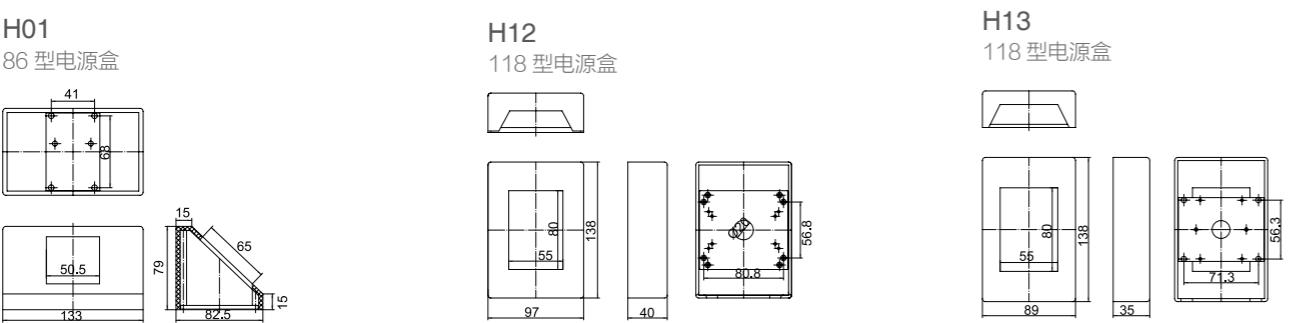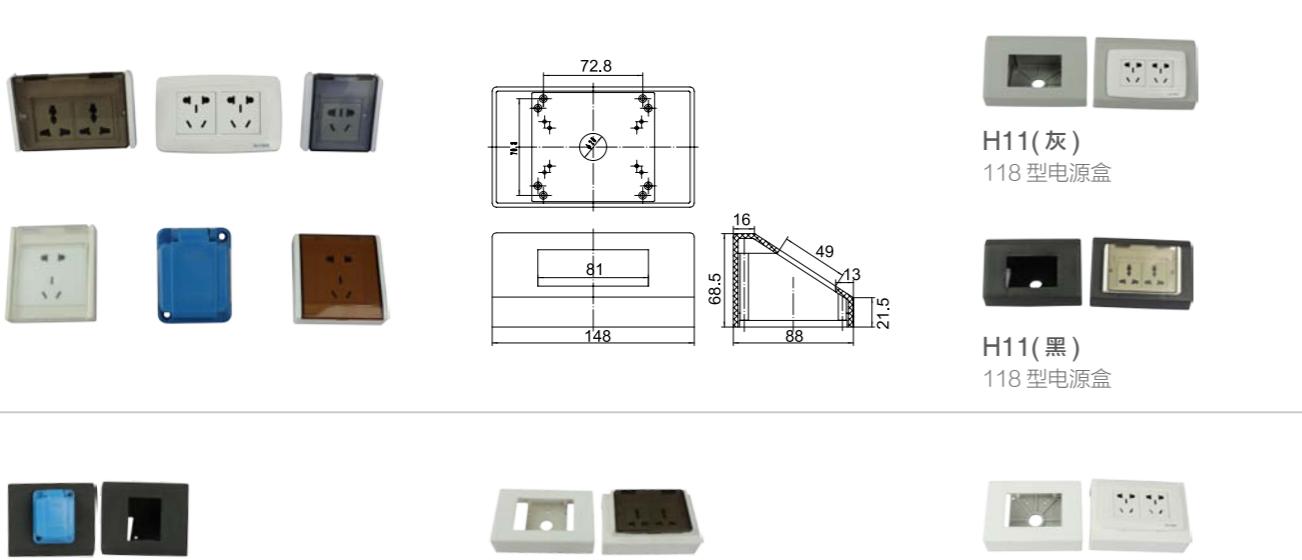

水阀 / 气阀旋钮配色表 (依照德国 DIN standard 13792:2002 标准)

DIN EN 13792:2002 Recommendation

Colour Coding of Operating Handles

	气体 / 液体 MEDIA	
	Irrigation water 灌溉用水	WCS
	Hot drinking water 热饮用水	WPH
	Cold drinking water 冷饮用水	WPC
	Well water 井水	WSP
	Hot industrial water 热工业用水	WNH
	Cold industrial water 冷工业用水	WNC
	Steam water 蒸汽	WST
	Condensate water 冷凝水	WCO
	Pure hot water 纯热水	WCH
	Return cooling water 冷却回水	WCR
	Cooling water 冷却水	WCF
	Pure cold water 纯冷水	WCC
	Hot surface water 热表层水	WSH
	Cold surface water 冷表层水	WSC
	Hot demineralised 热软化水 Water	WDH
	Cold demineralised 冷软化水 water	WDC
	Hot fresh water 热淡水	WRH
	Cold fresh water 冷淡水	WRC
	Distilled water 蒸馏水	WDI
	Town gas 煤气	G
	Propane/butane 丙烷 / 丁烷	LPG cylinder
	Methane 甲烷	CH ₄
	Propane 丙烷	C ₃ H ₈

	气体 / 液体 MEDIA	
	Butane 丁烷	C ₄ H ₁₀
	Ethylene 乙烯	C ₂ H ₄
	Propylene 丙烯	C ₃ H ₆
	Butylene 丁烯	C ₄ H ₈
	Acetylene 乙炔	C ₂ H ₂
	Argon/Methane 氩 / 甲烷	AR/CH ₄
	Hydrogene/Nitrogen H ₂ /N ₂	H ₂ /N ₂
	Hydrogene 氢气	H ₂
	Silan 硅烷	SiH ₄
	Hydrogene/Helium 氢气 / 氦气	H ₂ /HE
	Deuterium 氚气	D ₂
	Histograme 氮气	N ₂
	Nitrogen monoxide 一氧化二氮	N ₂ O
	Sint.Air 80/20	SA
	Compressed air 压缩空气	CA
	Oxygen 氧气	O ₂
	Carbon dioxide 二氧化碳	CO ₂
	High pressure air 高压空气	RA
	Breathing air	BA
	Carbogen 混合氧	CB
	Krypton 氖	Kr
	Xenon 氙	Xe
	Neon 氖	Ne

	气体 / 液体 MEDIA	
	Argon 氩	Ar
	Helium 氦	He
	Ammonia 氨气	NH ₃
	Nitrogen 二氧化氮	NO ₂
	Hydrogen Sulphide 硫化氢	H ₂ S
	Arsine 砷化氢	AsH ₃
	Phosphine 磷化氢	PH ₃
	Hydrochloric acid 盐酸	HCl
	Sulphurous Acid 亚硫酸	SO ₂
	Carbon Monoxide 一氧化碳	CO
	Phosgene 光气	COCl ₂
	Chloride 氯气	Cl ₂
	Vacuum 真空	V
	Low vacuum 低真空	VF
	High vacuum 高真空	VH
	Formaldehyde solution 甲醛	CH ₂ O
	Propanol 丙醇	C ₃ H ₈ O
	Methanol 甲醇	CH ₄ O
	Acetone 丙酮	C ₃ H ₆ O
	Trichloroethylene 三氯乙烯	C ₂ HCl ₃
	Perchloric acid 高氯酸	HCLO ₄

公司部分业绩 PART OF COMPANY PERFORMANCE

- | | | | |
|--------------|---------------------|---------------|----------------|
| 辽宁鞍山灵山医院 | • 渤海职业技术学院 | • 天津通标公司 | • 大连轻工学院 |
| 吉林工业大学 | • 郑州东方美容医院 | • 天津泰达学院 | • 大连水产学院 |
| 伊春市罗仕医院 | • 商丘疾病预防控制中心 | • 天津大学环境学院土建馆 | • 大连昆阳药业 |
| 哈尔滨第六制药厂 | • 商丘平原医院 | • 天津武警医学院 | • 大连联华手性公司 |
| 大连化工研究设计院 | • 益海嘉里粮油 | • 天津市武医学院 | • 大连海事大学 |
| 北京大兴妇幼保健院 | • 新疆建设兵团 | • 天津医大总医院 | • 大连三仪动物药品 |
| 北京首大耳鼻喉眼科医院 | • 中电四公司 | • 天津化工研究设计院 | • 东北林业大学园林学院 |
| 广西贺州人民医院 | • 阳煤集团 | • 天津大学 | • 东北林业大学动资学院 |
| 南宁人民医院 | • 鄂尔多斯市金诚泰化工有限责任公司 | • 天津泰达学院 | • 渤海大学 |
| 内蒙古陈巴尔虎动物监督所 | • 中煤黑龙江煤炭化工(集团)有限公司 | • 天津科技大学 | • 纽迪希亚 |
| 内蒙莫旗动物疾病控制中心 | • 四平昊华化工有限公司 | • 天津南开大学 | • 长春博泰 |
| 内蒙古中医院 | • 内蒙古临海化工股份有限公司 | • 天津河北工业大学 | • 鞍山钢铁 |
| 青海盐湖研究院 | • 利乐(中国)集团 | • 天津工业大学 | • 山东烟台海军工程指挥学院 |
| 兰州大学 | • 蒙牛集团 | • 天津血液中心 | • 山东福瑞达生化公司 |
| 饶阳县中医院 | • 光明乳业 | • 天津塘沽血站 | • 山东农科院高新技术 |
| 衡水疾控中心 | • 哈尔滨双城娃哈哈食品饮料有限公司 | • 天津石化大港培训中心 | • 山东荷泽医专 |
| 衡水动物疾病中心 | • 双城娃哈哈乳品有限公司 | • 天津天士力集团 | • 山东省畜牧局 |
| 河北大学附属医院 | • 中国石化第十建设公司 | • 天津力生制药 | • 山东中医药大学 |
| 冀衡集团 | • 威海滨海石油钻探有限公司 | • 天津万佳 | • 农业部动物检疫所 |
| 石药集团 | • 中石油长城钻探 | • 石家庄科技开发区 | • 东营轮胎 |
| 华北制药 | • 天津精华石化有限公司 | • 河北北方学院 | • 贝卡尔特 |
| 河北师范大学 | • 天津金海石油工程服务有限公司 | • 保定肉联厂 | • 德州学院 |
| 天津理工大学 | • 大庆东正油田 | • 天津中国石化 | • 青岛血液中心 |
| 天津南开大学化学系 | • 云南云天化国际化工股份有限公司 | • 哈尔滨生命科学院 | • 上海师范大学 |
| 北京积水潭医院 | • 北京同仁医院 | • 吉林大学农学部 | • 上海技术物理研究所 |
| 北京朝阳北京整形医院 | • 北京军区总医院 | • 锦州疾病控制中心 | • 上海医药工业研究院 |
| 北京海淀医院 | • 北京口腔医院 | • 航天三十一所 | • 上海中钞油墨 |

温馨提示：

- 以上只是部分业绩，尚有众多知名案例未尽其中。
 - 排名不分先后。